Base Load Power Hub (BLPH)

FIRE AND GAS FIELD EQUIPMENT

INSTRUMENT DATA SHEETS

Document Number: 1724000821-IN-DS-00004

Document Class: 2

02	10/10/2024	As Built (AB)	E. Balestri	M. Ossani	S. Montanari
01	08/07/2024	Accepted for Construction (AFC)	E. Balestri	M. Ossani	S. Montanari
00	30/05/2024	Issue for Review (IFR)	E. Balestri	M. Ossani	S. Montanari
Rev.	Date	Description	Prepared	Reviewed	Approved

FORES ENGINEERING

This document undergoes an issuance cycle within EDMS "Fusionlive".
Its distribution is electronically controlled. Once printed shall be considered as "NOT CONTROLLED" copy

Table of Contents

SH.	DESCRIPTION	REVISIONS							
		00	01	02					
1	Cover	X	X	X					
2	Table of Contents	X	X	X					
3	Revision / Change Log	X	X	X					
4	SMOKE DETECTOR ZETTLER MR601TEx	X							
9	SMOKE DETECTOR 4B-DHM deckhead mounting	X							
12	SMOKE TEST KIT	X	X						
15	GAS DETECTOR HYDROGEN Dräger Polytron® 8200 CAT DQ d S 4-20/HART®	X							
20	GAS DETECTOR ULTRASONIC Dräger Polytron® 8900 UGLD d S 4-20/HART® Relay	X							
25	GAS DETECTOR OXYGEN Dräger Polytron 8100 EC d S 4-20/Hart	X							
31	GAS CALIBRATION KIT	X							
32	FLAME DETECTOR FGD FlameSpec FLS-UV-IR-AS11	X							
37	FLAME DETECTOR FGD Test Lamp FLS-FSIM-UV-IR-KIT	X							
39	PUSH BUTTON MEDC SM87PBL MANUAL FIRE ALARM	X	X						
42	PUSH BUTTON MEDC SM87PBL PUSH BUTTON TO SIS	X	X						
45	GAS FLASH BEACON (AMBER) MEDC SM87LEDS	X	X						
48	FIRE FLASH BEACON (RED) MEDC SM87LEDS	X	X						
51	SOUNDER MEDC DB3BM	X	X						
54	PUSH BUTTON DPDT CONTACT EATON GHG 432		X	X					

This document undergoes an issuance cycle within EDMS "Fusionlive".
Its distribution is electronically controlled. Once printed shall be considered as "NOT CONTROLLED" copy

Revision / Change Log

Rev.	Description
00	Issue for Review (IFR)
01	Accepted for Construction (AFC)
02	As Built (AB)

HOLDS LIST

No.	Description
1.	
2.	
3.	
4.	

This document undergoes an issuance cycle within EDMS "Fusionlive".
Its distribution is electronically controlled. Once printed shall be considered as "NOT CONTROLLED" copy

SMOKE DETECTOR

POS.	TAG NUMBER	SERVICE
1	950-SDZ-04201	FZ-04 B-400 AMBIENT
2	950-SDZ-04202	FZ-04 B-400 AMBIENT
3	950-SDZ-04203	FZ-04 B-400 AMBIENT
4	950-SDZ-04207	FZ-04 B-300 AMBIENT
5	950-SDZ-04208	FZ-04 B-300 AMBIENT
6	950-SDZ-04209	FZ-04 B-300 AMBIENT
7	950-SDZ-04213	FZ-04 B-200 AMBIENT
8	950-SDZ-04214	FZ-04 B-200 AMBIENT
9	950-SDZ-04215	FZ-04 B-200 AMBIENT
10	950-SDZ-06201	FZ-06 B-100 AMBIENT
11	950-SDZ-06202	FZ-06 B-100 AMBIENT
12	950-SDZ-06203	FZ-06 B-100 AMBIENT
13	950-SDZ-04204	FZ-04 B-400 AMBIENT
14	950-SDZ-04205	FZ-04 B-400 AMBIENT
15	950-SDZ-04206	FZ-04 B-400 AMBIENT
16	950-SDZ-04210	FZ-04 B-300 AMBIENT
17	950-SDZ-04211	FZ-04 B-300 AMBIENT
18	950-SDZ-04212	FZ-04 B-300 AMBIENT
19	950-SDZ-04216	FZ-04 B-200 AMBIENT
20	950-SDZ-04217	FZ-04 B-200 AMBIENT
21	950-SDZ-04218	FZ-04 B-200 AMBIENT
22	950-SDZ-06204	FZ-06 B-100 AMBIENT
23	950-SDZ-06205	FZ-06 B-100 AMBIENT
24	950-SDZ-06206	FZ-06 B-100 AMBIENT

File: 1724000821-IN-DS-00004-02.xlsx
This document undergoes an issuance cycle within EDMS "Fusionlive".
Its distribution is electronically controlled. Once printed shall be considered as "NOT CONTROLLED" copy

ZETTLER MX

M600Ex Intrinsically Safe Fire Detectors

ZETTLER

M600Ex Fire Detection Range

Our sophisticated Ex system for use in hazardous atmospheres, introduces to the market a range of conventional I.S. fire detectors. In addition to the unobtrusive size and styled shape a number of design features have been incorporated including single visit to the ceiling installation and a service and maintenance detector park position.



Features

- Intelligent Universal Smoke/Heat/CO detector
- Low profile, discreet and unobtrusive
- Superior performance and reliability
- Designed for fast, easy installation
- Optional locking kit
- May be used in systems that meet BS5839 Pt 1
- Integral and remote alarm LED
- Certified to ATEX: Ex II 1GD and Cenelec: Ex ia IIC T5/ Ex iaD 20 T100°C
- Complies to EN54-7 for Smoke Detectors and EN54-5 for Heat Detectors

General

Included within the range is the High Performance Optical Smoke (HPO) Detector and a combined Carbon Monoxide and Heat Detector. The complete range has been designed to meet the requirements of BS (British Standards) and EN (European Standards) for fire detectors. The detectors also carry the new CE mark.

M600Ex Series Conventional Detectors

The M600Ex Series provides the detector part of an automatic fire detection system, as defined in BS5839 Pt1:2002. The M600Ex Series Conventional or two state detector is one that provides two output states to the controller, either 'normal' or a 'fire alarm' condition.

The detectors along with callpoints are grouped into zones, with each zone being connected to the control panel, by a two wire circuit. Each zone having a separate zone indicator at the control panel. Safety barriers are used to maintain the intrinsically safe status of the circuit under all conditions.

Application

As each type of fire detector responds to a particular 'fire product' the relative speed of response of the detector is therefore dependent upon the type of fire being detected. The range of M600Ex detectors have been designed to provide the earliest possible warning of a fire condition, with a minimum possibility of false/unwanted alarms.

As smoke is normally present at an early stage in most fires, smoke type detectors are therefore considered the most useful. When considering the type of smoke detector for the application, the probable type of fuel for the fire should be considered. For general fire detection, where there is an equal possibility of either a 'fast' or 'slow' fire developing, the intelligent high performance optical detector provides an excellent detection response.

In situations where the installation of smoke detectors would cause an unacceptable level of false alarms (i.e. kitchens, laundry areas) heat detectors may be installed. The M600Ex series provides a selection of heat detectors, from Rate of Rise to fixed temperature, because of the wide variety of applications that fire detectors are expected to cover, it is recommended that reference to BS5839 Pt1:2002 is made to aid selection.

High Performance Optical Smoke Detector MR601TEx



These detectors react to the whole range of fire products from slow smouldering fires, producing visible particles to open flaming fires producing large numbers of very hot smaller sized aerosols. It combines optical and heat detector technology to detect clear burning fire products which hitherto could only be easily detected by ion-chamber detectors.

For normal ambient conditions, the high performance optical detector behaves as a normal optical detector. Only when a rapid rise in temperature is detected does the sensitivity of the detector increase and the presence of smoke will confirm a fire condition which will be transmitted as an alarm level.

Heat Detector MD601Ex and MD611Ex



These detectors use two networked thermistors in a bridge configuration to provide a fast response, that depends both on absolute temperature and rate of rise of temperature.

The rate of rise/fixed temperature heat detectors can be used in areas where smoke sensors are unsuitable due to environmental conditions (smoke, dust etc.). Such areas include kitchens, locker rooms, canteens, garages, loading bays etc.

Enhanced Carbon Monoxide Fire and Heat Detector MDU601Ex



The MDU601Ex detector is a combined CO and Rate-of-Rise Heat detector where the sensitivity of the CO detector is enhanced in response to a fast rate of change of temperature.

Maybe used in dusty environments instead of the MR601TEx Detector

Technical Specifications

Mechanical

Detector Material:	FR110 "Bayblend" fire resistant
Dimensions:	See diagram below
Weight:	0.2 Kg detector and base (approx)
Colour:	White

Environmental

Operating Temp. Range:	-20°C to +70°C
	-10°C to +55°C (MDU601Ex only)
Storage Temp :	-25°C to +80°C
	-20°C to +55°C (MDU601Ex only)
Relative Humidity :	95% non condensing
	90% non condensing
	(MDU601Ex fonly)

Electrical


Supply Voltage:	16 to 28 vdc
Quiescent Current:	100µA typical
Alarm Current:	48 mA typical
Reset Time:	0.5 - 5 seconds
Wiring Connections:	SEM Terminal 2 x 1.5 mm^2

Electromagnetic Compatibility

ESD:	to EN50130-4
Radiated Immuntity:	to EN50130-4
Fast Transient:	to EN50130-4
Slow High Energy:	to EN50130-4
Conducted Immunity:	to EN50130-4
Emissions:	to EN61000-6-3

Approvals

These detectors have the following approvals:
LPCB Loss Prevention Certification Board VdS Verband der Sachversicherer

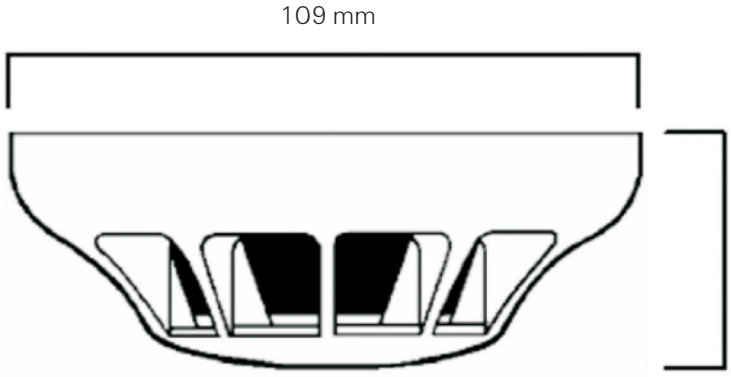

ZETTLER, is a leading brand of fire detection products in the European market. The ZETTLER fire detection product line includes a wide range of EN54 CPD approved fire detection products carrying approvals and cross-listings, including VdS and NF. The ZETTLER product lines are available through ZETTLER Authorised Distributors as well as many Johnson Controls offices around the world.

Tyco Fire & Security GmbH, Victor von Bruns Strasse 21, CH-8212 Neuhausen am Rheinfall, Switzerland

© 2017 Johnson Controls. All rights reserved. All specifications and other information shown were current as of document revision date and are subject to change without notice.

www.acornfiresecurity.com



Fig. 8: Conduit Junction Box
1–Fixing centre

4B-DHM deckhead mounting

The Deckhead Mounting is designed to be used in particularly damp or dirty environments. The kit is illustrated in Figure 9.

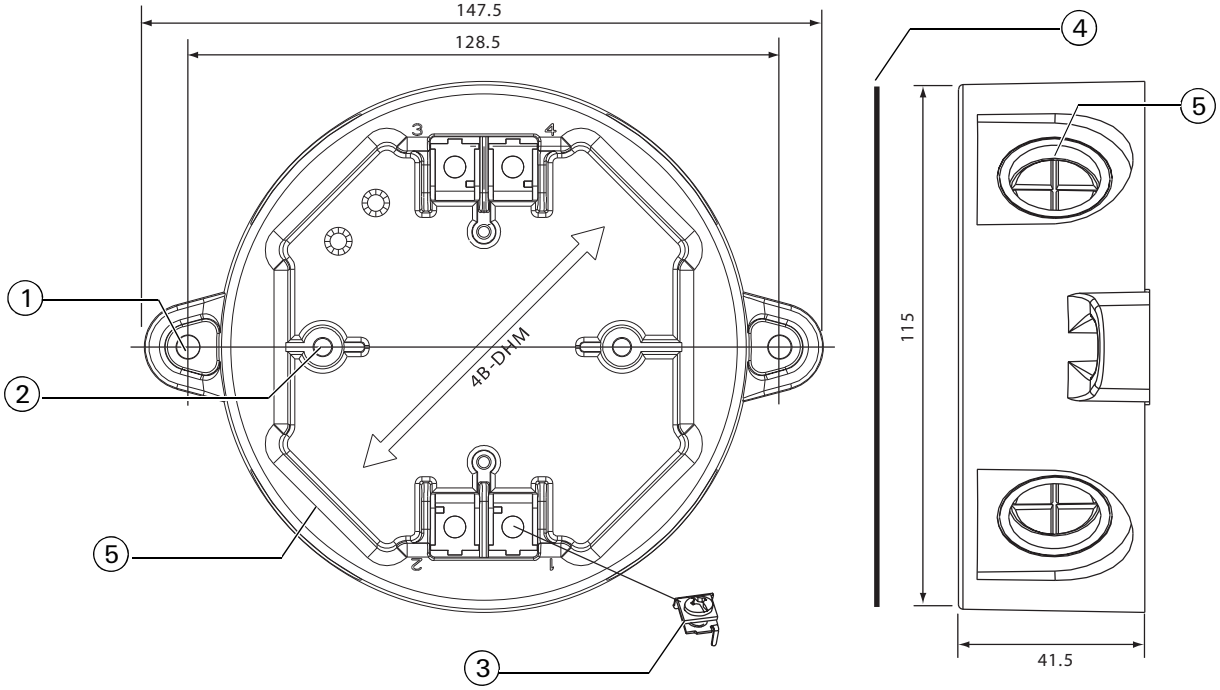


Fig. 9: 4B-DHM deckhead mounting
1–Fixing hole (x 2). 5 mm diameter
2–Detector base mounting post (x 2)
3–Base accessory terminal (only one factory fitted – more can be ordered)
4–Sealing gasket
5–Gland/conduit knockout, 4 positions. 20 or 25 mm diameter

The Deckhead Mounting Kit comprises:

- The mounting housing.
- Two self tapping posidrive pan head screws to secure the detector base.
- Sealing gasket.

4B-DHM Technical specification

- Weight: 200 g
- Material
  - Body: glass filled P.B.T.
  - Base Accessory Terminal: annealed spring steel
  - Base Accessory Terminal Screw: stainless steel
- Environmental

www.acornfiresecurity.com

www.acornfiresecurity.com

- Storage Temperature: -30 °C to +75 °C
- Operating Temperature: -25 °C to +70 °C
- Relative Humidity: up to 95 % RH (non-condensing)

To install the 4B-DHM

1 Note that the item numbers in this procedure refer to Figure 9. Remove gland/conduit knockouts (Item 5) as appropriate. For the larger 25 mm diameter, a hole cutter is required.

2 Note the alignment required for detector Status Indicator LED visibility.

An arrow is embossed in the bottom of the 4B-DHM. Mount the 4B-DHM so this arrow is aligned in the direction required for visual inspection of the detector Status Indicator LED.

3 Choose a mounting position that that is flat in the area contacting the housing.

To mount using welding, now jump to the section "4B-DHM Installation – welded" on page 7. Otherwise carry on at the next step.

4 Fix the 4B-DHM to the surface by screwing through the fixing holes – item 1 in Figure 9.

For the screws, use two No. 8 x 1" countersunk zinc plated and passivated steel screws, for example.

5 Remove the backing from the sealing gasket (Item 4 in Figure 9). Carefully stick the gasket to the front surface of the 4B-DHM. Fit the gasket round the rim, so that it will form a seal with the detector base.

6 Fit the LED Apperture Plug to the base – see the section "LED aperture plug" on page 3.

7 Secure the base to the 4B-DHM using the supplied two 4.2 x 25mm self tapping posidrive pan head screws.

4B-DHM Installation – welded

You will have jumped here from Step 3 in the procedure "To install the 4B-DHM" on page 7.

The 4B-DHM can be fixed to metal surfaces using welding. Two screws are inserted into the back of the 4B-DHM. These screws are then welded to the surface.

To fix the 4B-DHM using welding

1 Position the 4B-DHM so the flat base (that contacts the mounting surface) is towards you. This position corresponds to Figure 10. The item numbers in Figure 10 are referred to in this procedure.

2 Using pliers, nibble away the thin knockout section in the circular wall (Item 4).

3 Cover the knockouts and surrounding area with high temperature masking tape. This provides protection from weld spatter. Clear the tape from over the knockouts with a knife.

4 Insert screws (not supplied) into the holes (Item 1) . Use 6.3 x 25mm (No. 14 x 1") self tapping screws.

5 Using a double sided adhesive pad (Item 2), or tape, fix the 4B-DHM to the surface.

6 Weld the screw heads to the surface. Use Mig/ Tig welding for approximately 1.5 seconds per weld. For access, use the knockouts you removed previously.

7 Remove the masking tape and clean away any deposits.

8 Jump back to Step 5 in the procedure "To install the 4B-DHM".

www.acornfiresecurity.com

www.acornfiresecurity.com

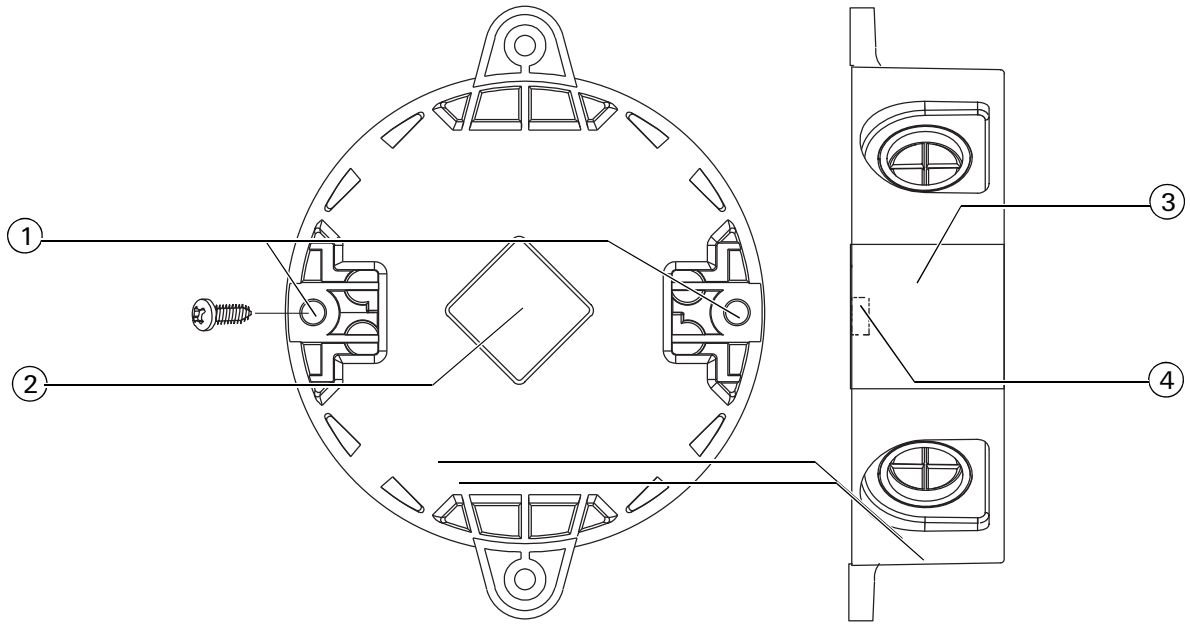


Fig. 10: 4B-DHM welding option
1–Screw holes
2–Double sided adhesive pad or tape
3–masking tape
4–Knockout

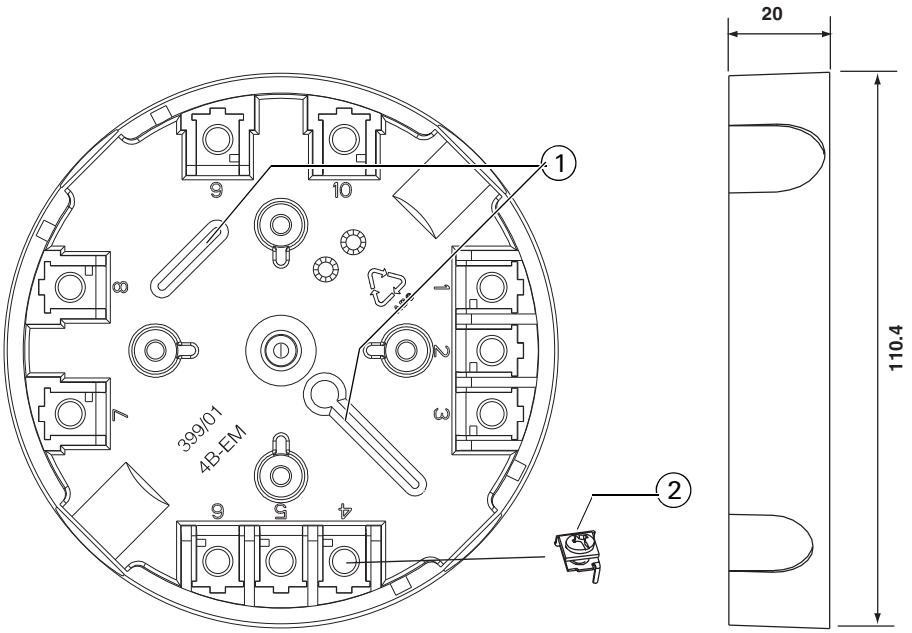


Fig. 11: 4B-EM Euro mounting box
1–Mounting slots
2–Base accessory terminal (only one factory fitted – more can be ordered)

4B-EM european mounting box

The European Mounting Box is shown in Figure 11).

This is intended for use in EC countries using 18 mm and 21 mm cable breakouts.

The housing is secured with two No. 8 x 1 inch countersunk zinc plated and passivated steel screws (or equivalent).

www.acornfiresecurity.com



solo™
detectortesters

*A **single** testing system.*
*A **complete** range of testing tools.*





detectortesters
testing technology from No Climb

solo™ detectortesters

A complete range of test and maintenance equipment for smoke, heat and CO detectors.

Testing equipment must be proven to be safe for the engineer and the system, it needs to be cost-effective, versatile, portable, approved by all detector manufacturers and in compliance with international codes and standards.

The Solo range meets all of these requirements.

SMOKE DETECTOR TESTING



SIGNALING UL LISTED Fire Alarm Equipment 77TL Smoke Detector Accessory

Solo 330 Aerosol Dispenser

Codes and standards require functional tests to introduce (simulated) smoke through the detector vents and into the sensing chamber. The Solo 330 dispenser is the most popular device for achieving this, benefiting as it does, from a cup big enough for the great majority of detectors but still small enough not to be obstructive and unwieldy.

- UL Listed
- Approved by leading detector manufacturers
- Dispenser and patented diaphragm contain particles – conserves test gas / smoke
- Strong – to withstand rigours of daily use
- Spring-loaded mechanism – for effective, economic aerosol delivery
- Clear cup – enables view of the detector LED while testing
- Universal – suits most detectors
- Designed for use at height and at angles
- Interchangeable with all other tools on Solo poles
- Lifetime Warranty



Solo 330 for use with **Solo A3** & **C3** Aerosols

Solo 332 is available for larger diameter detectors.

Solo 332
Aerosol Dispenser



> "...the testing system is high quality and is very well liked by our technicians and customers alike. The use of this product helps TSS fulfill its goal as the premiere fire alarm company in NYC"
>
> John Bonanno
> **TSS Integrated Systems**

DETECTOR TESTING AEROSOLS

Solo A10S Smoke Aerosol
Non-Flammable Solution

The new HFC-Free smoke aerosol for the functional testing of smoke detectors. Like all Solo products, Solo A10S is approved by leading detector manufacturers and offers the reliability and quality expected by the industry.

- **Simple** to use
- **Fast** activation – via Solo 330 dispenser
- **Rapid** clearing
- **Compatible** with leading detector brands



Choosing the right aerosol

Chemicals used in detector test equipment need to be compatible with the plastics from which the detectors are manufactured. Not all test aerosols offer this compatibility which can lead to problems such as stress cracking in detectors, residue build up, damage to components and harm to the environment. Solo aerosols are the most thoroughly researched solutions – approved by leading detector manufacturers, third parties and fire engineers.

- **UL & ULC Certified**
- **Approved** by world leading detector manufacturers
- **Non-flammable** (same as Solo A3)
- **HFC-Free** – fully compliant with latest regulations: Protecting the global environment
- **Silicone Free** – prevents detector contamination: Protecting the local environment

Solo A10S is available in the standard 250ml can.




Ordering information	Product Code:
Solo A10S 250ml	SOLO A10S-001
Sold in multiples of 12	

detectortesters

www.solo-tester.com


TELESCOPIC ACCESS POLES

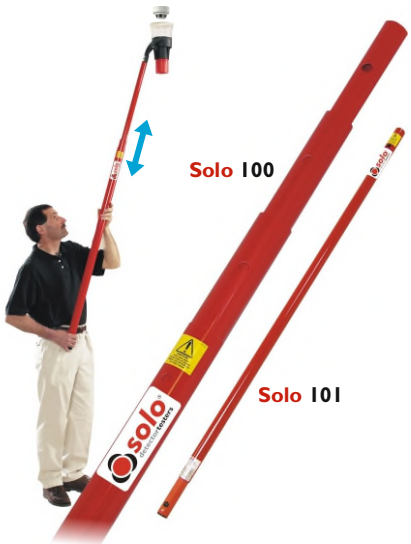

Solo 100/101/108 Telescopic Access Poles

The core element of the Solo range is the telescopic and extension access poles which are extremely lightweight and quickly extend to provide access to detectors up to 9 metres*.

- Light – easy to use at height, on-site, day after day
- Non-whip – even at height
- Certified non-conductive – protecting both the engineer and overhead live equipment from inadvertent shorts
- Available in one, two or four telescopic sections
- Lifetime Warranty

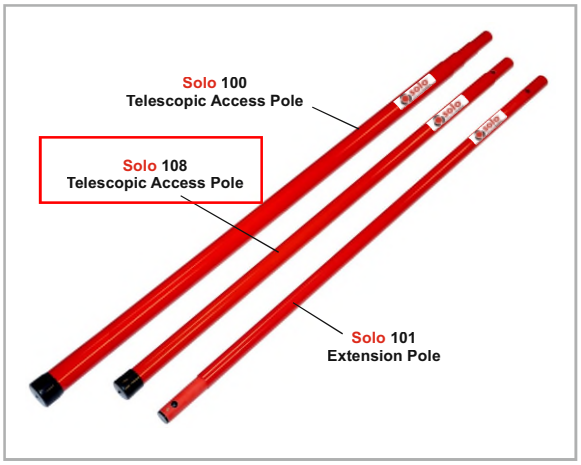

*See Product Selector for details on height guide.

HYDROGEN POINT DETECTORS

POS.	TAG NUMBER	SERVICE
1	950-GDZ-02101	H2 GD FZ-02 H2 STORAGE VESSELS AREA
2	950-GDZ-02102	H2 GD FZ-02 H2 STORAGE VESSELS AREA
3	950-GDZ-02103	H2 GD FZ-02 H2 STORAGE VESSELS AREA
4	950-GDZ-02104	H2 GD FZ-02 H2 STORAGE VESSELS AREA
5	950-GDZ-02105	H2 GD FZ-02 H2 STORAGE VESSELS AREA
6	950-GDZ-02106	H2 GD FZ-02 H2 STORAGE VESSELS AREA
7	950-GDZ-02107	H2 GD FZ-02 H2 STORAGE VESSELS AREA
8	950-GDZ-02108	H2 GD FZ-02 H2 STORAGE VESSELS AREA
9	950-GDZ-02109	H2 GD FZ-02 H2 STORAGE VESSELS AREA
10	950-GDZ-02110	H2 GD FZ-02 H2 STORAGE VESSELS AREA
11	950-GDZ-02111	H2 GD FZ-02 H2 STORAGE VESSELS AREA
12	950-GDZ-02112	H2 GD FZ-02 H2 STORAGE VESSELS AREA
13	950-GDZ-02113	H2 GD FZ-02 H2 STORAGE VESSELS AREA
14	950-GDZ-02114	H2 GD FZ-02 H2 STORAGE VESSELS AREA
15	950-GDZ-02115	H2 GD FZ-02 H2 STORAGE VESSELS AREA
16	950-GDZ-02116	H2 GD FZ-02 H2 STORAGE VESSELS AREA
17	950-GDZ-04201	H2 GD FZ-04 B-400 HVAC AIR INTAKE
18	950-GDZ-04202	H2 GD FZ-04 B-400 HVAC AIR INTAKE
19	950-GDZ-04203	H2 GD FZ-04 B-400 HVAC AIR INTAKE
20	950-GDZ-04204	H2 GD FZ-04 B-400 AMBIENT
21	950-GDZ-04205	H2 GD FZ-04 B-400 AMBIENT
22	950-GDZ-04206	H2 GD FZ-04 B-400 AMBIENT
23	950-GDZ-04207	H2 GD FZ-04 B-300 HVAC AIR INTAKE
24	950-GDZ-04208	H2 GD FZ-04 B-300 HVAC AIR INTAKE
25	950-GDZ-04209	H2 GD FZ-04 B-300 HVAC AIR INTAKE
26	950-GDZ-04210	H2 GD FZ-04 B-300 AMBIENT
27	950-GDZ-04211	H2 GD FZ-04 B-300 AMBIENT
28	950-GDZ-04212	H2 GD FZ-04 B-300 AMBIENT
29	950-GDZ-04213	H2 GD FZ-04 B-200 HVAC AIR INTAKE
30	950-GDZ-04214	H2 GD FZ-04 B-200 HVAC AIR INTAKE
31	950-GDZ-04215	H2 GD FZ-04 B-200 HVAC AIR INTAKE
32	950-GDZ-04216	H2 GD FZ-04 B-200 AMBIENT
33	950-GDZ-04217	H2 GD FZ-04 B-200 AMBIENT
34	950-GDZ-04218	H2 GD FZ-04 B-200 AMBIENT
35	950-GDZ-05101	H2 GD FZ-05 BESS AREA
36	950-GDZ-05102	H2 GD FZ-05 BESS AREA
37	950-GDZ-05103	H2 GD FZ-05 BESS AREA
38	950-GDZ-05104	
39	950-GDZ-05105	
40	950-GDZ-05106	
41	950-GDZ-06201	H2 GD FZ-06 B-100 HVAC AIR INTAKE
42	950-GDZ-06202	H2 GD FZ-06 B-100 HVAC AIR INTAKE
43	950-GDZ-06203	H2 GD FZ-06 B-100 HVAC AIR INTAKE
44	950-GDZ-06204	H2 GD FZ-06 B-100 AMBIENT
45	950-GDZ-06205	H2 GD FZ-06 B-100 AMBIENT
46	950-GDZ-06206	H2 GD FZ-06 B-100 AMBIENT
47	950-GDZ-03104	H2 GD FZ-03 ELECTROLYZER PK AREA
48	950-GDZ-03105	H2 GD FZ-03 ELECTROLYZER PK AREA
49	950-GDZ-01103	H2 GD FZ-03 ELECTROLYZER PK AREA

File: 1724000821-IN-DS-00004-02.xlsx
This document undergoes an issuance cycle within EDMS "Fusionlive".
Its distribution is electronically controlled. Once printed shall be considered as "NOT CONTROLLED" copy

Dräger Polytron® 8200 CAT
Detection of flammable gases and vapors

The Dräger Polytron® 8200 CAT is an advanced explosion-proof transmitter for the detection of combustible gases in the lower explosion limit (LEL). It uses a catalytic bead DrägerSensor® Ex that will detect most flammable gases and vapors. In addition to a 3-wire 4 to 20-mA analog output with relays it also offers HART®, Modbus and Fieldbus protocols, making it compatible with most control systems.



Dräger. Technology for Life®

Benefits

Fast and stable – the DrägerSensor® Ex

The built-in DrägerSensor® Ex is based on the proven catalytic bead measuring principle. It has excellent long-term stability with outstanding poison resistance. And this is the reason for its durability. Due to the novel gas inlet opening, the sensor responds to gas in only a few seconds. This allows you to react immediately with countermeasures and prevent the development of a flammable atmosphere.

Easy device management via digital communication

The Dräger Polytron 8200 is equipped with digital interfaces allowing for quick and easy remote interrogation of the transmitter's state. Integration with existing asset management systems such as PACTware™ is possible via DTM. In addition to the common HART® communication system, the fieldbus interfaces PROFIBUS® PA, FOUNDATION fieldbus™ H1, and Modbus RTU are also available.

Same design, same operating principle

The Dräger Polytron 8200 belongs to the Polytron 8000 series. All transmitters in this series have the same design and user interface. This allows for uniform operation with reduced training and maintenance requirements. The large graphic backlit display shows status information clearly and in an easy to use format. The measured gas concentration, selected gas type, and measuring unit are displayed during normal operation. Colored LEDs (green, yellow and red) provide additional alarm and status information.

The Polytron 8200 is operated by means of a magnetic wand over contact surfaces.

Three relays for controlling external equipment

Upon request, the Dräger Polytron 8200 can also be supplied with three integrated relays. This enables you to use it as an independent gas detection system with two arbitrarily adjustable concentration alarms and one fault alarm. Audible alarms, signal lights or similar devices can thus be controlled locally without an additional cable between the transmitter and central controller.

Safe, robust housing for every application

Polytron 8200 features a Class I, Div. 1 rated explosion proof enclosure made from aluminium or stainless steel, making it suitable for a wide range of environmental conditions.

Make the impossible possible with the remote sensor

A remote explosion proof junction allows installation of the sensor up to 350' away from the transmitter in difficult to access areas. A permanently attached remote calibration adapter allows for remote bump testing or calibration from the Polytron display by using permanently attached tubing that takes the calibration gas to the sensor.

Technical Data

Dräger Polytron® 8200 CAT			
Type	Explosion proof / flameproof enclosed transmitter (“d”)		
Gases	Flammable gases and vapors		
Measuring ranges	DQ	0 to 100 % LEL	
	LC	0 to 10 % LEL	
Display	Backlit graphic LCD; 3 Status LEDs (green/yellow/red)		
Performance Characteristics	Accuracy/repeatability	Zero	≤ 1 % LEL
		Span	≤ 1 % LEL
		Long-term drift	≤ 3 % LEL after 6 months
	Response time	T50	< 7 seconds (methane)
		T90	< 13 seconds (methane)
Electrical data	Signal output analog	Normal operation	4 to 20 mA, 3- or 4-wire, sink or source
		Maintenance	Constant 3.4 mA (adjustable)
		Fault	< 1.2 mA
	Signal output digital	HART® w/ 3- or 4-wire, PROFIBUS® PA, FOUNDATION fieldbus™ H1 and Modbus RTU w/ 5-wires	
	Power supply	10 to 30 V DC	
	Power consumption (max.)	DQ w/o relay, non-remote	105 mA at 24 V
		DQ w/ relay, remote	145 mA at 24 V
	Relay specification (option)	2 alarm relays and 1 fault relay, SPDT 5 A @ 230 VAC, 5 A @ 30 VDC	
Environmental conditions (see sensor data sheet)	Temperature	-40 to 80 °C (-40 to 176 °F) without relay -40 to 70 °C (-40 to 158 °F) with relay- -50 to 85 °C (-122 to 185 °F) remote sensor	
	Pressure	23.6 to 38.4 inch Hg / 800 to 1,200 mbar	
	Humidity	5 to 95% r. h., non-condensing	
Housing	Transmitter housing	Epoxy coated copper-free aluminium or stainless steel SS316 L	
	Sensor housing	Stainless steel 303	
	Enclosure protection type	NEMA 4X & 7, IP65/66/67	
	Cable entry point	3/4" NPT threaded holes or M20 cable gland	
	Dimensions (H x W x D)	11.0" x 5.9" x 5.1" / 280 x 150 x 130 mm	
	Weight, approx.	Aluminium	4.9 lbs / 2.2 kg
		SS316 L	8.8 lbs / 4.0 kg
Approvals*	UL & CSA	Class I, Div 1, Groups A, B, C, D;	
		Class II, Div 1, Groups E, F, G;	
		Class I, Zone 1, Group IIC;	
		T-Code T6/T4	
	IECEx	Ex db IIC T6/T4 Gb, -40 ≤ Ta ≤ +40/+70 °C;	
	ATEX	II 2G Ex db IIC T6/T4 Gb, -40 ≤ Ta ≤ +40/+70 °C;	
	CE markings	ATEX (Directive 2014/34/EU)	
		Electromagnetic Compatibility (Directive 2014/30/EU)	
		Low Voltage (Directive 2014/35/EU)	
	Shipping approvals (for DQ sensor only)	DNV GL, ABS, LR, CCS, RMRS	
	MED approval (for DQ sensor only)	Certificate No. MEDB0000411	

Technical Data

	DEKRA Performance approval (for DQ sensor only)	Certificate No. BVS 13 ATEX G 001 X
	SIL 2 certified by TUEV Sued	Certificate No. Z10 053474 0023

* All docking station versions are only ATEX/IECEx approved

Ordering Information

Dräger Polytron® 8200 CAT	Approval Code	Order Number
Dräger Polytron® 8200 CAT DQ d A 4-20/HART®	XTR 0410	83 44 439
Dräger Polytron® 8200 CAT DQ d A 4-20/HART® relay	XTR 0411	83 44 440
Dräger Polytron® 8200 CAT DQ d S 4-20/HART®	XTR 0510	83 44 448
Dräger Polytron® 8200 CAT DQ d S 4-20/HART® relay	XTR 0511	83 44 449
Dräger Polytron® 8xx0 Kit (Custom configuration e. g. LC sensor or bus communication)		83 44 800

Accessories		Order Number
Magnetic wand		45 44 101
Pipe mount bracket		45 44 198
Aluminum junction box for remote sensor ‘d’		45 44 099
Stainless steel junction box for remote sensor ‘d’		45 44 098
Duct mount kit		68 12 725
IR Connection Kit Polytron® 5000/8000		45 44 197
PolySoft licence (1 year)		83 28 600
PolySoft licence (subscription)		83 28 601
Splash guard		68 12 510
Weather protection kit Dräger Polytron® 5/6/8xxx		37 02 198
Gassing adapter	PE, w/o tubing	68 06 978
	PE incl. tubing	46 09 314
Calibration adapter Viton®		68 10 536
Process adapter (Stainless steel) for DQ		68 12 470
Process adapter (Stainless steel) for LC		68 12 465

HART® is a registered trademark of the HART Communication Foundation.
FOUNDATION fieldbus™ is a registered trademark of the Fieldbus Foundation™.
PROFIBUS® is a registered trademark of PROFIBUS and PROFINET International (PI).
PACTware™ is a registered trademark of Pepperl+Fuchs GmbH.
Viton® is a registered trademark of the DuPont company.
Windows® is a registered trademark of Microsoft Corporation.

HYDROGEN ULTRASONIC LEAK DETECTORS

POS.	TAG NUMBER	SERVICE
1	950-GDZ-01101	H2 GD FZ-01 FUEL CELL PK AREA
2	950-GDZ-01102	H2 GD FZ-01 FUEL CELL PK AREA
3	950-GDZ-02117	H2 GD FZ-02 H2 STORAGE VESSELS AREA
4	950-GDZ-02118	H2 GD FZ-02 H2 STORAGE VESSELS AREA
5	950-GKDZ-02119	H2 GD FZ-02 H2 STORAGE VESSELS AREA
6	950-GDZ-02120	H2 GD FZ-02 H2 STORAGE VESSELS AREA
7	950-GDZ-03101	H2 GD FZ-03 ELECTROLYZER PK AREA
8	950-GDZ-03102	H2 GD FZ-03 ELECTROLYZER PK AREA
9	950-GDZ-03103	H2 GD FZ-03 ELECTROLYZER PK AREA

File: 1724000821-IN-DS-00004-02.xlsx
This document undergoes an issuance cycle within EDMS "Fusionlive".
Its distribution is electronically controlled. Once printed shall be considered as "NOT CONTROLLED" copy

Dräger Polytron® 8900 UGLD
Ultrasonic Gas Leak Detector

The Dräger Polytron® 8900 UGLD transmitter is an early warning area monitor for detecting high-pressure gas leaks in outdoor industrial process environments. Thanks to an ultrasonic acoustic sensor, it responds earlier than conventional gas detectors because it registers the sound of leaking gas instead of measuring the concentration of accumulated gas clouds. As gas escapes, leaks are immediately detected in the surrounding area, regardless of the wind direction.



Dräger. Technology for Life®

Benefits

Ultrasonic sensor technology – the early warning system for gas leaks

Typical gas detection systems used to monitor pressurised gas pipes or containers in industrial environments only detect a gas leak if the gas is in the immediate vicinity of the gas sensor. Environmental influences such as wind can delay or prevent a gas cloud from being detected by gas sensors. On the contrary, the Dräger Polytron 8900 UGLD is not affected by environmental factors and detects a high-pressure gas leak as soon as gas escapes. Effective early gas leak warnings can prevent unnecessary shutdowns, saving time and money.

A perfect complement to your gas detection system

The Dräger Polytron 8900 extends the Polytron 8000 series family with acoustic gas leak detection. All transmitters in this series have the same design and an identical user interface. A common user interface ensures that little training or maintenance is required for existing users. The Polytron 8900 UGLD perfectly complements existing flame and gas detection systems with reliable early gas leak warnings.

Delivers results that are easy to understand

For easy interpretation of results, the measured values on the display of the Polytron 8900 UGLD are shown from 0 to 100 percent of the full scale decibel sensitivity range. The ultrasound level is immediately displayed and transmitted without the use of difficult to interpret artificial intelligence. Alarms are configured at a specific level above a predetermined background noise level. Additionally, a time delay of up to 30 seconds can be set in the control system.

Can even detect gas leaks in loud industrial environments

Loud process areas generate noise which is mostly in the audible spectrum. Gas leaks from pressurized vessels above 10 bar generate both audible sound and inaudible ultrasound. Since Polytron 8900 is tuned to measure in the ultrasound spectrum, it can easily identify gas leaks with a leak rate of 100 g/sec in a 65 ft radius circle.

Robust design and fully-sealed sensor

The Polytron 8900 UGLD is an explosion-proof transmitter with a sensor housed in a galvanically-isolated, intrinsically-safe enclosure. The sensor is an ultrasonic microphone that is completely sealed in PVCC, making it impervious to water and dirt. It provides reliable readings without the need for an additional environmental protection baffle. Regular calibration is not necessary, but unlike some other UGLDs on the market, calibration is possible and easy. The expected lifespan of the ultrasonic sensor is more than 10 years.

Technical Data

Dräger Polytron® 8900 UGLD

Type	Explosion proof / flameproof enclosed transmitter (“d”) or combined with increased safety (“d/e”)			
Gases	Flammable and toxic gases such as hydrogen, methane, ethylene, propane, CO_2, nitrogen and hydrogen sulphide			
Measurement ranges	0-100% equivalent to 55-110 dB; typical alarm setting 10% UGLD signal above background			
Display	Back-lit graphic LCD display; 3 status LEDs (green/yellow/red)			
Sensor Type	PVCC coated piezoelectric microphone with built-in automatic self-test sound generator			
Sensor Performance	Response Time	< 3 sec.		
	Minimum Pressure	> 2 bar (29 psi) Methane		
	Coverage Radius	6.5ft -65 ft depending on gas type, leak rate and background noise		
	Frequency Range	18 kHz - 80 kHz		
Electrical data	Analogue signal output	Normal operation	4 to 20 mA	
		Maintenance	Constant 3.4 mA or	
			4 mA ±1 mA	
			1 Hz modulation; (adjustable)	
		Fault	< 1,2 mA	
	Digital signal output	HART®		
	Power supply	10 to 30 V DC, 3-wire		
	Power consumption	w/ relay, remote	100 mA at 24 V	
	Relay specification	Two alarm relays and one error relay, SPDT 5 A @ 230 VAC, 5 A @ 30 VDC		

Environmental conditions (See sensor data sheet)	Temperature	-40 to 70°C (-40 to 158°F) with relays
	Pressure	700 to 1,300 mbar
	Humidity	0 to 100 % relative humidity
Housing	Transmitter housing	Stainless steel SS316L
	Sensor housing	Polyamide 6
	Housing protection type	NEMA 4X & 7, IP65/66/67
	Cable entry	Three ¾" NPT thread openings or M20 cable gland
	Dimensions (H × W × D)	11.02" x 5.90" x 5.12" inches
	Weight, approx.	11 lbs
Approvals	UL	Class I, Div 1, Groups A, B, C, D; Class I, Zone 1, Group IIC; T-Code T4
	CSA*	Class I, Div 1, Groups A, B, C, D; Class I, Zone 1, Group IIC; T-Code T4
	IECEx	Ex db [ia] IIC T4 Gb, -40 ≤ Ta ≤ +40 / +70 °C Ex db eb [ia] IIC T4 Gb, -40 ≤ Ta ≤ +40/ +70°C; “e” version;
	ATEX	II 2G Ex db [ia] IIC T4 Gb, -40 ≤ Ta ≤ +40 / +70 °C II 2G Ex db eb [ia] IIC T4 Gb, -40 ≤ Ta ≤ +40/+70°C; “e” version
	CE Markings	ATEX (Directive 2014/34/EU) Electromagnetic compatibility (Directive 2014/30/EU) Low voltage (Directive 2014/35/EU)
	Marine approval*	DNV-GL

Technical Data

	SIL 2	Certificate TÜV Süd

* Pending

Ordering Information

Dräger Polytron® 8900 UGLD	Approval code	Part number
Polytron® 8900 UGLD d S 4-20/HART® Relay Stainless Steel Ex d Housing with 4-20mA HART® output and 3 Relays	ETR 0521	83 28 030

Accessories		Part number
Magnetic Wand		45 44 101
Remote Sensing Head with wall mount kit		83 28 021
Connecting cable with plug for the Remote Sensing Head	5 m	83 23 305
	15 m	83 23 315
	30 m	83 23 330
UGLD Calibration and Bump Test Kit w/o Air Cylinder		83 28 042
Zero Air Gas Cylinder 103L for Calibration and Bump Test Kit		45 10 058
Pole Mount Kit		45 44 198
Polysoft Basic (one year license)		83 28 600
Polysoft Basic (Subscription – yearly fee)		83 28 601
IR Connection Kit (requires PolySoft)		45 44 197

HART® is a registered trademark of the HART Communication Foundation.

OXYGEN POINT DETECTORS

POS.	TAG NUMBER	SERVICE
1	950-GDZ-03107	O2 DET. FZ-03 ELECTROLYZER PK AREA
2	950-GDZ-03108	O2 DET. FZ-03 ELECTROLYZER PK AREA
3	950-GDZ-03109	O2 DET. FZ-03 ELECTROLYZER PK AREA

File: 1724000821-IN-DS-00004-02.xlsx
This document undergoes an issuance cycle within EDMS "Fusionlive".
Its distribution is electronically controlled. Once printed shall be considered as "NOT CONTROLLED" copy

Dräger Polytron® 8100 EC
Detector for toxic gases and oxygen

The Polytron® 8100 EC is Dräger's top of the line explosion-proof transmitter for the detection of toxic gases or oxygen. It uses a high performance plug and play electrochemical DrägerSensor to detect a specific gas. Besides having a 3-wire 4 to 20 mA analog output with relays, it also offers HART®, Modbus and Fieldbus protocol, making it compatible with most control systems.



Dräger. Technology for Life®

Benefits

Durable, intelligent and sensitive – the DrägerSensor®

With unique electrochemical DrägerSensors, Polytron 8100 can detect over 100 toxic gases and oxygen. These long life sensors provide continuous detection even under the harshest conditions. DrägerSensors offer the industry's widest temperature and humidity range between -40 °C to +65 °C (-40 °F to +150 °F). The built-in memory contains all calibration and configuration information: therefore the sensor ships pre calibrated and is ready for immediate operation. An intelligent sensor self-test function allows for predictive maintenance. The intrinsically safe connection of the sensor eliminates the need for a flame arrestor, giving you faster response times and higher sensitivity.

Easy device management via digital communication

The Dräger Polytron 8100 is equipped with digital interfaces allowing for quick and easy remote interrogation of the transmitter's state. Integration with existing asset management systems such as PACTware™ is possible via DTM. In addition to the common HART® communication system, the fieldbus interfaces with PROFIBUS® PA, FOUNDATION fieldbus™ H1, and Modbus RTU are also available.

Same design, same operating principle

The Dräger Polytron 8100 belongs to the Polytron 8000 series. All transmitters in this series have the same design and user interface. This allows for uniform operation with reduced training and maintenance requirements. The large graphic backlit display shows status information clearly and in an easy to use format. The measured gas concentration, selected gas type, and measuring unit are displayed during normal operation. Colored LEDs (green, yellow and red) provide additional alarm and status information. The Polytron 8100 is operated by means of a magnetic wand over contact surfaces.

Three relays for controlling external equipment

Upon request, the Dräger Polytron 8100 can also be supplied with three integrated relays. This enables you to use it as an independent gas detection system with two arbitrarily adjustable concentration alarms and one fault alarm. Audible alarms, signal lights or similar devices can thus be controlled locally without an additional cable between the transmitter and central controller.

Safe, robust housing for every application

Polytron 8100 features a Class I, Div. 1 rated explosion proof enclosure made from epoxy coated aluminium or 316L stainless steel, making it suitable for a wide range of environmental conditions.

Remote sensor option does not require conduit

The remote sensor enclosure allows you to install the sensor separately from the transmitter. This 'external' installation makes it easier to use if the sensor has to be installed in a difficult to access or unfavorable position.

Technical Data

Dräger Polytron® 8100 EC

Type	Explosion proof / flameproof enclosed transmitter (“d”)		
Gases	Toxic gases and oxygen, dependent on the sensor used		
Measuring ranges	Customized adjustment, see sensor data sheet		
Display	Backlit graphic LCD; 3 Status LEDs (green/yellow/red)		
Performance Characteristics	see sensor datasheet		
Electrical data	Signal output analog	Normal operation	4 to 20 mA, 3- or 4-wire, sink or source
		Maintenance	Constant 3.4 mA (adjustable)
		Fault	< 1.2 mA
	Signal output digital	HART® w/ 3- or 4-wire, PROFIBUS® PA, FOUNDATION fieldbus™ H1 and Modbus RTU w/ 5-wires	
	Power supply	10 to 30 V DC	
	Power consumption (max.)	w/o relay, non-remote	80 mA at 24 V
		w/ relay, remote	100 mA at 24 V
	Relay specification (option)	2 alarm relays and 1 fault relay, SPDT 5 A @ 230 VAC, 5 A @ 30 VDC	
Environmental conditions (see sensor data sheet)	Temperature	-40 to 65 °C (-40 to 149 °F) without relay	
		-40 to 65 °C (-40 to 149 °F) with relay	
	Pressure	20.7 to 38.4 inch Hg / 700 to 1,300 mbar	
	Humidity	0 to 100 % r. h., non-condensing	
Housing	Transmitter housing	Epoxy coated copper-free aluminium or stainless steel SS316 L	
	Sensor housing	Polyamide	
	Enclosure protection type	NEMA 4X & 7, IP65/66/67	
	Cable entry point	3/4" NPT threaded holes or M20 cable gland	
	Dimensions (H x W x D), approx.		11.0" x 5.9" x 5.1" / 280 x 150 x 130 mm
	Weight, approx.	Aluminium	6.6 lbs / 3.0 kg
		SS316 L	11.0 lbs / 5.0 kg
Approvals	UL & CSA	Class I, Div 1, Groups A, B, C, D;	
		Class II, Div 1, Groups E, F, G;	
		Class I, Zone 1, Group IIC;	
		T-Code T6/T4	
	IECEx	Ex db [ia] IIC T6/T4 Gb,	
		-40 ≤ Ta ≤ +40/+70 °C;	
	ATEX	II 2G Ex db [ia] IIC T6/T4 Gb,	
		-40 ≤ Ta ≤ +40/+70 °C;	
	FM Performance (H_2S sensor)	Certificate No: FM16NUS0015	
		FM 6340:2014, FM Class 3810:2005,	
		ISA–92.00.01-2010	
	CE marking	ATEX (Directive 2014/34/EU)	
		Electromagnetic Compatibility (Directive 2014/30/EU)	
		Low Voltage (Directive 2014/35/EU)	
	Marine approvals	DNV GL, ABS, LR, CSS, RMRS	
	MED approval	Certificate no. MEDB0000411	
	DEKRA Performance approval (for O_2 sensors only)	Certificate no. BVS 13 ATEX G 001 X	
		EN 60079-29-16:2016	
	SIL 2 certified by TUEV Sued	Certificate no. Z10 053474 0023	

Ordering Information

Dräger Polytron® 8100 EC	Approval Code	Order Number
Dräger Polytron® 8100 EC d A 4-20/HART®	ETR 0400	83 44 403
Dräger Polytron® 8100 EC d A 4-20/HART® relay	ETR 0401	83 44 404
Dräger Polytron® 8100 EC d S 4-20/HART®	ETR 0500	83 44 412
Dräger Polytron® 8100 EC d S 4-20/HART® relay	ETR 0501	83 44 413
Dräger Polytron® 8xx0 Custom Configuration, e.g. Modbus – visit www.draeger.com/polytron to configure yours		83 44 800

Electrochemical DrägerSensors	Order Number
DrägerSensor® AC	68 10 595
Initial Operation Set for DrägerSensor AC	68 09 381
DrägerSensor® Cl_2	68 09 665
DrägerSensor® $COCl_2$	68 09 930
DrägerSensor® CO	68 09 605
DrägerSensor® CO LS	68 09 620
DrägerSensor® CO LH	68 12 570
DrägerSensor® H_2	68 09 685
DrägerSensor® H_2O_2 HC	68 09 675
DrägerSensor® H_2O_2 LC	68 09 705
DrägerSensor® H_2S LC	68 09 610
DrägerSensor® H_2S HC	68 09 710
DrägerSensor® H_2S	68 10 435
DrägerSensor® HCl	68 09 640
DrägerSensor® HCN	68 09 650
DrägerSensor® HCN LC	68 13 200
DrägerSensor® Hydrides	68 09 635
DrägerSensor® Hydrides SC	68 09 980
DrägerSensor® PH_3/AsH_3	68 09 695
DrägerSensor® Hydrazine	68 10 180
DrägerSensor® NH_3 LC	68 09 680
DrägerSensor® NH_3 HC	68 09 645
DrägerSensor® NH_3 TL	68 13 095
DrägerSensor® NH_3 FL	68 13 260
DrägerSensor® NO LC	68 09 625
DrägerSensor® NO_2	68 09 655
DrägerSensor® NO_2 LC	68 13 205
DrägerSensor® O_3	68 14 005
DrägerSensor® O_2 LS	68 09 630
DrägerSensor® OV1	68 10 740
DrägerSensor® OV2	68 10 745
DrägerSensor® SO_2	68 09 660

Accessories	Order Number
Magnetic wand	45 44 101
Sensor Test Dongle	83 17 619
Diagnostic Dongle	83 17 860
Pipe mount bracket	45 44 198
Duct mount kit	68 12 725
Duct mount adapter for remote EC sensing head	83 17 617
Remote adapter RS stainless steel	83 23 404

Ordering Information

IR Connection Kit Polytron® 5000/8000			45 44 197
PolySoft licence (1 year)			83 28 639
PolySoft licence (subscription)			83 28 640
EC Sensing Head Remote w/ mount kit			68 12 684
Connection cable w/ plug for		16 ft / 5 m	83 23 305
Remote EC Sensing Head		49 ft / 15 m	83 23 315
		98 ft / 30 m	83 23 330
Splash guard			68 12 510
Weather protection kit Dräger Polytron® 5/6/8xxx			37 02 198
Calibration adapter FKM Viton®			68 10 536
Gassing adapter		PE incl. tubing	45 09 314
Dust filter (not for Cl_2, HCl, H_2O_2, O_3, N_2H_4)			68 09 595
Dust filter (SO_2)			68 12 224
Selective filter A2F (CO, CO LS, H_2)			68 09 684
Selective filter K2F ($COCl_2$)			68 09 933
Selective filter NF (HCl)			68 09 643
Selective filter HSF (Hydrides)			68 09 862
Selective filter D3F (CO)			68 12 435
Selective filter MF (PH_3, AsH_3)			68 09 638
Selective filter K1F (SO_2)			68 09 663

HART® is a registered trademark of the HART Communication Foundation.
FOUNDATION fieldbus™ is a registered trademark of the Fieldbus Foundation™.
PROFIBUS® is a registered trademark of PROFIBUS and PROFINET International (PI).
PACTware™ is a registered trademark of Pepperl+Fuchs GmbH.
Viton® is a registered trademark of the DuPont company.
Windows® is a registered trademark of Microsoft Corporation.

GAS CALIBRATION KIT

2x Calibration set Hydrogen Point Detector
1x Draeger: Carrying case for 2 test gas cylinders
1x Draeger: Calibration gas 99.999 Vol.% N2 in Air
1x Draeger: Calibration gas 2 Vol.% H2 in Air
1x Draeger: Regulator 0.5 L/min
2x Hose Isoversinic 1,5 m
2x Calibration adapter V
1x Magnetic wand

1x Calibration set Oxygen Point Detector
1x Draeger: Carrying case for 2 test gas cylinders
1x Draeger: Calibration gas 99.999 Vol.% N2 in Air
1x Draeger: Calibration gas 18 Vol.% O2 in N2
1x Draeger: Regulator 0.5 L/min
2x Hose Isoversinic 1,5 m
2x Calibration adapter V
1x Magnetic wand

File: 1724000821-IN-DS-00004-02.xlsx
This document undergoes an issuance cycle within EDMS "Fusionlive".
Its distribution is electronically controlled. Once printed shall be considered as "NOT CONTROLLED" copy

FLAME DETECTOR

POS.	TAG NUMBER	SERVICE
1	950-FDZ-01101	FZ-01 FUEL CELL PK AREA
2	950-FDZ-01102	FZ-01 FUEL CELL PK AREA
3	950-FDZ-01103	FZ-01 FUEL CELL PK AREA
4	950-FDZ-01104	FZ-01 FUEL CELL PK AREA
5	950-FDZ-02101	FZ-02 H2 STORAGE VESSELS AREA
6	950-FDZ-02102	FZ-02 H2 STORAGE VESSELS AREA
7	950-FDZ-02103	FZ-02 H2 STORAGE VESSELS AREA
8	950-FDZ-02104	FZ-02 H2 STORAGE VESSELS AREA
9	950-FDZ-03101	FZ-03 ELECTROLYZER PK AREA
10	950-FDZ-03102	FZ-03 ELECTROLYZER PK AREA
11	950-FDZ-03103	FZ-03 ELECTROLYZER PK AREA
12	950-FDZ-03104	FZ-03 ELECTROLYZER PK AREA
13	950-FDZ-04101	FZ-04 B-400/B-300/B-200 AREA
14	950-FDZ-04102	FZ-04 B-400/B-300/B-200 AREA
15	950-FDZ-04103	FZ-04 B-400/B-300/B-200 AREA
16	950-FDZ-04104	FZ-04 B-400/B-300/B-200 AREA
17	950-FDZ-05101	FZ-05 BESS AREA
18	950-FDZ-05102	FZ-05 BESS AREA
19	950-FDZ-05103	FZ-05 BESS AREA
20	950-FDZ-05104	FZ-05 BESS AREA
21	950-FDZ-06101	FZ-06 B-100 AREA
22	950-FDZ-06103	FZ-06 B-100 AREA

File: 1724000821-IN-DS-00004-02.xlsx
This document undergoes an issuance cycle within EDMS "Fusionlive".
Its distribution is electronically controlled. Once printed shall be considered as "NOT CONTROLLED" copy

FlameSpec
UV-IR
UV-IR Flame Detector



The FlameSpec UV-IR will detect fires and explosions extremely quickly, thereby allowing mitigation steps to be initiated more rapidly to limit event escalation.

Introduction

The FlameSpec-UV-IR flame detector provides ultra-fast response, high performance and reliable detection of a large variety of fires including hydrocarbon fires (visible and non-visible), as well as hydrogen and methane/hydrogen mixed fires. The detector addresses slow growing fires as well as fast eruptions of fire using improved UV-IR technology. The detector operates in all weather and light conditions.

Key Benefits

- High immunity to false alarm
- High sensitivity – up to 100 ft. (30m) for a 1 ft^2 (0.1m^2) n-heptane pan fire.
- Hydrocarbon and non-hydrocarbon flame detection.
- Ultra-fast detection mode detection within 5 milliseconds for fireballs or explosions
- High speed (<0.5s) model [X5] available for compliance with NFPA 33.
- Four sensitivity levels.
- Universal outputs, 3 and 4 wire, 4-20 mA sink / source, Fire, Auxiliary and Fault Relays. RS485 port using Modbus RTU.
- Event logger – alarms, faults and other relevant events are logged to non-volatile memory
- Built-in-Test (BIT) – Automatic and manual self-test of window cleanliness and overall detector operation.
- Dirty optics warning for preventive maintenance needs.
- HART® 7, for configuration & maintenance - option available.
- Window heater to avoid condensation and icing.
- Stainless steel tilt mount with horizontal and vertical adjustment.
- Functional safety - SIL 2 capable - option available.
- Detect high UV (sparks and arcs) or IR levels via auxiliary relay and 4-20mA.

Fire and Gas Detection Technologies Inc. | 4222 E. La Palma Ave. Anaheim, CA 92807 USA
Tel: (+1) 714-671-8500 | support@fg-detection.com
Version: F110V0010.08 • May 2023

FlameSpec UV-IR

UV-IR Flame Detector

Model: FLS-UV-IR

Response Characteristics

Fuel	Size	Sensitivity	Distance ft. (m)	Avrg Resp.Time (s)
N-Heptane	1 x 1 ft.	Extreme	98 (30)	2.0
N-Heptane	1 x 1 ft.	High	75 (23)	1.7
N-Heptane	1 x 1 ft.	Medium	49 (15)	1.0
N-Heptane	1 x 1 ft.	Low	16 (5)	1.0
Gasoline	2 x 2 ft.	Extreme	197 (60)	3.3
Gasoline	1 x 1 ft.	Extreme	98 (30)	1.8
Gasoline	1 x 1 ft.	Medium	49 (15)	1.3
Methane	32-in Plume	Extreme	59 (18)	1.4
Methane	32-in Plume	Medium	30 (9)	0.9
LPG	32-in Plume	Extreme	75 (23)	1.2
LPG	32-in Plume	High	56 (17)	1.6
LPG	32-in Plume	Medium	33 (10)	1.2
LPG	32-in Plume	Low	13 (4)	1.2
Diesel	1 x 1 ft.	Extreme	75 (23)	2.6
Diesel	1 x 1 ft.	Medium	36 (11)	1.2
JP5	1 x 1 ft.	Extreme	75 (23)	3.3
JP5	1 x 1 ft.	High	56 (17)	1.8
JP5	1 x 1 ft.	Medium	36 (11)	1.2
JP5	1 x 1 ft.	Low	16 (5)	1.2
Kerosene	1 x 1 ft.	Extreme	75 (23)	1.8
Kerosene	1 x 1 ft.	Medium	36 (11)	0.9
Methanol	1 x 1 ft.	Extreme	52 (16)	0.8
Methanol	1 x 1 ft.	High	43 (13)	3.2
Methanol	1 x 1 ft.	Medium	30 (9)	1.3
Methanol	1 x 1 ft.	Low	10 (3)	2.7
Ethanol	1 x 1 ft.	Extreme	62 (19)	4.1
Ethanol	1 x 1 ft.	Medium	31 (9.5)	2.9
Isopropanol	1 x 1 ft.	Extreme	75 (23)	2.2
Isopropanol	1 x 1 ft.	Medium	36 (11)	0.8
Polypropylene	1 x 1 ft.	Extreme	49 (15)	1.4
Polypropylene	1 x 1 ft.	Medium	23 (7)	0.9
Hydrogen	32-in Plume	Extreme	66 (20)	6.4
Hydrogen	32-in Plume	Medium	33 (10)	1.0
Syngas (30%CH_4:70%H_2)	32-in Plume	Extreme	59 (18)	3.2
Syngas (30%CH_4:70%H_2)	32-in Plume	Medium	33 (10)	1.2

FlameSpec UV-IR

UV-IR Flame Detector

Model: FLS-UV-IR

Immunity to False Alarm

False Alarm Source	Modulated		Unmodulated	
	Distance ft. (m)	Response	Distance ft. (m)	Response
Sunlight, Direct, Reflected		No Alarm		No Alarm
Incandescent frosted glass light, 300W	2.0 (0.5)	No Alarm	2.0 (0.5)	No Alarm
Fluorescent, 70W (3x23.3W)	2.0 (0.5)	No Alarm	2.0 (0.5)	No Alarm
Electric arc	2.0 (0.5)	No Alarm	2.0 (0.5)	No Alarm
Arc welding	10.0 (3.0)	No Alarm	10.0 (3.0)	No Alarm
Radiation heater, 2000W	2.0 (0.5)	No Alarm	2.0 (0.5)	No Alarm
Halogen lamp (500W) non-shielded	7.0 (2.0)	No Alarm	7.0 (2.0)	No Alarm
Halogen lamp (1000W)	2.0 (0.5)	No Alarm	2.0 (0.5)	No Alarm
Mercury vapor lamp 160Wx3	2.0 (0.5)	No Alarm	2.0 (0.5)	No Alarm
Exhausts	2.0 (0.5)	No Alarm	2.0 (0.5)	No Alarm
Projector led	2.0 (0.5)	No Alarm	2.0 (0.5)	No Alarm
Solenoid bell	2.0 (0.5)	No Alarm	2.0 (0.5)	No Alarm
soldering iron	2.0 (0.5)	No Alarm	2.0 (0.5)	No Alarm
Electric Drill	2.0 (0.5)	No Alarm	2.0 (0.5)	No Alarm

FlameSpec UV-IR

UV-IR Flame Detector

Model: FLS-UV-IR

FIRE DETECTION	**Detection time and distance**	5ms for fast burst of explosion 1s for 1 ft² (0.1m²) n-heptane pan fire at 0–50 ft. (0–15m) < 2s for 1 ft² (0.1m²) n-heptane pan fire at 50–100 ft. (15–30m)
	Sensitivity Range	4 sensitivity ranges: Extreme, High, Medium, Low
	Field of view (IR detection)	90° Horizontal, 80° Vertical
	Time Delay	0-30 seconds
	Built in Test	Automatic and Manual
ELECTRICAL SPECIFICATIONS	**Operating Voltage**	24 VDC nominal (18-32 VDC)
	Current Consumption	Standby: 120mA 180mA all systems in operation (including window heater)
	Electrical Entries	2x cable and conduit entries 3/4" NPT(F) or M25x1.5
	Wiring	14-17 AWG (2.5–1.0 mm²)
OUTPUTS	**Relays**	SPST volt-free contacts rated 2A at 30 VDC 3 relays: Alarm & Auxiliary – normally open; Fault – normally closed
	0-20mA (stepped) current output	3 wire and 4 wire (isolated) configurations (sink and source) HART® rev 7.0 (option available)
	Indication	Tri-color LED (Green, Yellow, Red)
	Modbus	RTU compatible on RS-485
MECHANICAL SPECIFICATIONS	**Size**	5.51 x 3.54 × 3.54" (140×90×90mm)
	Weight	Detector (Stainless Steel 316): 6.6 lbs. (3.0 kg) Tilt mount (Stainless Steel 316): 3.3 lbs. (1.5 kg)
ENVIRONMENTAL SPECIFICATIONS	**Temperature Range**	Operating: -67°F to +185°F (-55°C to +85°C) Storage: -67°F to +185°F (-55°C to +85°C)
	Humidity	Up to 99% (RH), non-condensing
	Ingress Protection	IP66 & 68 (2m, 24hr); NEMA 4X & 6P
APPROVALS	**ATEX**	ATEX: II 2 G D Ex db IIC T5 Gb or Ex db eb IIC T5 Gb and Ex tb IIIC T95°C Db -55°C<Ta<75°C Ex db IIC T4 Gb or Ex db eb IIC T4 Gb and Ex tb IIIC T105°C Db -55°C<Ta<85°C
	IECEx, INMETRO & PESO	Ex db IIC T5 Gb -50°C≤Ta≤75°C Ex db IIC T4 Gb -50°C≤Ta≤85°C
	FMus & FMc	Class I, Div. 1, Groups B, C & D; T4 Class I, Zone 1, AEx/Ex db IIC T4 Gb T4 -50°C≤Ta≤85°C T5 -50°C≤Ta≤75°C
	EAC CU TR	1Ex d IIC T5 Gb or 1Ex de IIC T5 Gb and Ex tb IIIC T95°C Db -55°C≤Ta≤75°C 1Ex d IIC T4 Gb or 1Ex de IIC T4 Gb and Ex tb IIIC T105°C Db -55°C≤Ta≤85°C
	Performance	ANSI FM 3260 EN 54-10
	Functional safety	Certified SIL2 capable per IEC 61508:2010 High & Low demand (option available)

ACCESSORIES	**Tilt mount, model FLS-TMO-S01**	**High vibration mounting bracket, model FLS-MIL-S01**
	Weather cover, model FLS-WCO-S01	**Flame simulator, model FLS-FSIM-UV-IR-KIT**
	2" & 3" pole mount adapter, model FLS-PMA-S23	**Airshield, model FLS-ASD-S01**
	Duct mount with window, model FLS-DMW-S01	**Duct mount for airshield, model FLS-DMX-S01**
WARRANTY	**5 years**	

FlameSpec
FLS-FSIM
Flame Simulator Family



The FlameSpec Flame Simulator range provides fast and convenient detector verification in the field.

Introduction

Flame simulators are often used by industry to perform detector testing during commissioning and periodic system testing. FlameSpec simulators differ from many competing products because they test the active sensors and detection algorithms of the devices without using "bypass" techniques to trick the detector into responding.

The FSIM range is lightweight, simple to use and has a modern ergonomic design. Suitable for use in hazardous areas, the FSIM-IR3 has an extended trigger distance of up to 30 feet (10 meters) from the detector.

Three FSIM models are available, depending on the FlameSpec Detector to be tested, IR3, IR3-H2 and UV-IR.

Key Benefits

- Tests the active sensors and detection algorithms, without using "bypass" techniques.
  - No tricks, detector performance assured.
- Works from distance up to 30 feet (10 meters).
  - Reduces the need for scaffolding.
- Hazardous area use approved.
  - Hot work permits not needed required.
- Lightweight and simple to use.
  - More than 1,000 activations between charges.
- Includes carrying strap, protective storage case, battery charger and operating instructions.
- Easy to transport & supplied with everything needed.
- Complementary to FlameSpec Detector inbuilt test features.
  - Enables full end to end (loop) system test.

Fire and Gas Detection Technologies Inc. | 4222 E. La Palma Ave., Anaheim, CA 92807
Tel: (+1) 714-671-8500 | support@fg-detection.com
Version: F300V0010.04 • Oct 2023

FlameSpec-FLS-FSIM

Flame Simulator Family

	Simulator Kits Part Nos	FLS-FSIM-IR3-KIT	FLS-FSIM-IR3-H2-KIT	FLS-FSIM-UV-IR-KIT
	Detector type	FLS-IR3[1] FLS-IR3-HD[1]	FLS-IR3-H2 FLS-IR3-H2-HD	FLS-UV-IR FLS-UV-IR-HD
OPERATION DISTANCES	**Detector Sensitivity**	ft. m	ft. m	ft. m
	Extreme	30 9.0	30 9.0	42.5 13.0
	High	20 6.0	20 6.0	26 8.0
	Medium	10 3.0	10 3.0	20 6.0
	Low	3.3[2] 1.0[2]	3.3[2] 1.0[2]	6.6 2.0
ELECTRICAL SPECIFICATIONS	**Operating Voltage nominal, V**	3.7	3.7	3.7
	Number of activations between charging	~1000	~1000	~50
	Battery Capacity, mAh	>3000	>3000	>3000
	Charging time, hours	up to 3	up to 3	up to 3
	Indication	3 Color LED (Green, Yellow, Red)		
	All Simulator Models			
MECHANICAL SPECIFICATIONS	**Size**	3.9 x 3.9 x 7.8" (100 x 100 x 200mm)		
	Weight	3.96 lbs. (1.8 kg)		
	Simulator Enclosure Material	Painted Aluminum LM25		
ENVIRONMENTAL SPECIFICATIONS	**Ingress Protection**	IP65 (NEMA 4X)		
	Humidity	up to 99% (RH), non-condensing		
	Operating temperature	Min: −4°F (−20°C) Max: +122°F (+50°C)		
APPROVALS	**Explosion proof**	ATEX Ex II 2 G Ex db ib op is IIC T6 Gb Ex II 2 D Ex tb ib op is IIIC T85°C Db -20°C<Ta<+50°C		
ACCESSORIES included in kits	**Carrying Case**	FLS-FSIM-CASE		
	Carrying Strap	FLS-FSIM-STRAP		
	Cover Tool	FLS-FSIM-TOOL		
	Allen Key	FLS-FSIM-ALLEN		
	Battery Charger	FLS-FSIM-CHRGR		
WARRANTY	**3 Years**			

[1]not CO2L variant
[2]with collimator removed

MANUAL FIRE ALARM

POS.	TAG NUMBER	SERVICE	DUTY LABEL
1	950-MFA-01101	FZ-01 MFA ACTIVATION	MANUAL FIRE ALARM ACTIVATION
2	950-MFA-01102	FZ-01 MFA ACTIVATION	MANUAL FIRE ALARM ACTIVATION
3	950-MFA-01103	FZ-01 MFA ACTIVATION	MANUAL FIRE ALARM ACTIVATION
4	950-MFA-02101	FZ-02 MFA ACTIVATION	MANUAL FIRE ALARM ACTIVATION
5	950-MFA-03101	FZ-03 MFA ACTIVATION	MANUAL FIRE ALARM ACTIVATION
6	950-MFA-03102	FZ-03 MFA ACTIVATION	MANUAL FIRE ALARM ACTIVATION
7	950-MFA-03103	FZ-03 MFA ACTIVATION	MANUAL FIRE ALARM ACTIVATION
8	950-MFA-03104	FZ-03 MFA ACTIVATION	MANUAL FIRE ALARM ACTIVATION
9	950-MFA-04101	FZ-04 MFA ACTIVATION	MANUAL FIRE ALARM ACTIVATION
10	950-MFA-04102	FZ-04 MFA ACTIVATION	MANUAL FIRE ALARM ACTIVATION
11	950-MFA-04201	FZ-04 MFA ACTIVATION - B-400 INDOOR	MANUAL FIRE ALARM ACTIVATION
12	950-MFA-04202	FZ-04 MFA ACTIVATION - B-300 INDOOR	MANUAL FIRE ALARM ACTIVATION
13	950-MFA-04203	FZ-04 MFA ACTIVATION - B-200 INDOOR	MANUAL FIRE ALARM ACTIVATION
14	950-MFA-05101	FZ-05 MFA ACTIVATION	MANUAL FIRE ALARM ACTIVATION
15	950-MFA-05102	FZ-05 MFA ACTIVATION	MANUAL FIRE ALARM ACTIVATION
16	950-MFA-05103	FZ-05 MFA ACTIVATION	MANUAL FIRE ALARM ACTIVATION
17	950-MFA-05104	FZ-05 MFA ACTIVATION	MANUAL FIRE ALARM ACTIVATION
18	950-MFA-06101	FZ-06 MFA ACTIVATION	MANUAL FIRE ALARM ACTIVATION
19	950-MFA-06102	FZ-06 MFA ACTIVATION	MANUAL FIRE ALARM ACTIVATION
20	950-MFA-06201	FZ-06 MFA ACTIVATION - B-100 INDOOR	MANUAL FIRE ALARM ACTIVATION
21	950-MFA-07101	FZ-07 MFA ACTIVATION	MANUAL FIRE ALARM ACTIVATION

File: 1724000821-IN-DS-00004-02.xlsx
This document undergoes an issuance cycle within EDMS "Fusionlive".
Its distribution is electronically controlled. Once printed shall be considered as "NOT CONTROLLED" copy

SM87BG & SM87PB manual call point range

Ex d, Ex ia, weatherproof



Overview

These manual fire alarm, emergency shutdown break-glass and pushbutton units have been designed for the most arduous environmental conditions.

The units are both easy to install and maintain. Intrinsically safe Ex ia and flameproof Ex d versions of each model are available.

A choice of either stainless steel or alloy makes the range suitable for either the offshore or onshore industries. Stainless steel, one of the most durable materials available on the market, is both hard wearing and corrosion resistant, increasing the life of products in harsh environments and therefore reducing maintenance costs.

Features

- Zone 0, Zone 1 and Zone 2 use*
- ATEX certified
- UL listed for USA and Canada (SM87PBL only). Class I, Div 1, Groups C & D
- ULC certified (SM87PBL only) for Class I, Zone 1 Groups C & D
- CSA certified
- IECEx certified
- Brazilian (INMETRO) certified
- Russian Fire certified
- PESO certified (Ex d only)
- SIL 2 certified (SM87PB only)
- IP66 and IP67
- DNV type approval (IEC 60945) (SM87PB only)
- Certified temperature: –55°C to +70°C*
- Stainless steel or marine grade alloy
- Robust yet lightweight
- Easy to maintain

*Model dependent

Eaton
Unit B, Sutton Parkway
Oddicroft Lane
Sutton in Ashfield
United Kingdom
NG17 5FB

T: +44 (0) 1623 444 400
www.crouse-hinds.com/hac
MEDCSales@Eaton.com

© 2024 Eaton
All Rights Reserved
Printed in UK
Publication
No.DSMC0005/H
March 2024

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

Powering Business Worldwide

All specifications, dimensions, weights and tolerances are nominal (typical) and Eaton reserve the right to vary all data without prior notice.
No liability is accepted for any consequence of use.

Certifications


ATEX Ex d	Cert. no. Baseefa03ATEX0075. ATEX Approved Ex II 2GD Certified to: EN60079-0, EN60079-1, EN60079-31 Ex d IIC T5/T6 Gb, Ex tb IIIC T85°C/T100°C Db. IP66/IP67
ATEX Ex ia	Cert no. Baseefa 02ATEX0152X. ATEX Approved Ex II 1GD Certified to: EN60079-0, EN60079-11 Ex ia IIC T4 Ga, Ex ia IIIC T135°C Da
IECEx Ex d	Cert. no. IECEx BAS 09.0060 Certified to: EN60079-0, EN60079-1, EN60079-31 Ex d IIC T5/T6 Gb, Ex tb IIIC T85°/T100°C Db. IP66/IP67
IECEx Ex ia	Cert. no. IECEx BAS 10.0033X Certified to: IEC60079-0, IEC60079-11, Ex ia IIC T4 Ga, Ex ia IIIC T135°C Da
UL	Listing no. E186629 UL listed to Class 1, Div 1. Groups C & D. (SM87PBL)
ULC	Cert. no. 20091023-E320282 ULC certified for Class I, Zone 1 Groups C & D (SM87PBL)
CSA Explosion proof	Class 1, Div 1 & 2. Group D Ex d IIC T5/T6 Gb
CSA Intrinsically safe	Class 1, Div 1 & 2. Groups A-D
INMETRO Ex d	Ex db IIC T5/T6 Gb
Type Approvals	DNV (IEC 60945) (Stainless Steel SM87PB only)
SIL	SM87PB only - SIL2 Certification to IEC61508. Cert no. 20151118-4786827453
CCC	Ex d IIC T5/T6 Gb, Ex tD A21 IP66/IP67 T85°C/T100°C

Specifications


Material	Grade 316 ANC4B stainless steel or LM 25 TF marine grade alloy
Finish	Paint finish as standard or to customer specification
Voltage	Ex d 24V a.c./d.c. Ex ia 28V
Rating	2A
Switches	2 pole c/o, wired to terminals Optional up to 4 pole (UL version 2 pole only)
Optional indicator	A red high intensity LED can be fitted for alarm indication As standard the LED is not provided with over current protection. The forward current (If) should be limited to 20mA
Certified temp	Ex d* –55°C to +70°C. Ex ia* –55°C to +60°C –20°C to +55°C (LED version only) UL –40°C to +70°C, –20°C to +55°C (LED version only) CSA Explosion proof - Class 1, Div 1 & 2. –50°C to +55°C CSA - Ex d IIC –55°C to +70°C CSA Intrinsically safe - Class 1, Div 1 & 2 –50°C to +40°C *Note: includes ATEX, IECEx & INMETRO versions
Weight	3·8 kg. steel (approx.) or 2.5 kg. alloy (approx)
Ingress protection	IP66 & IP67. SM87PB IP68 (35m for 40 hours)
Entries	Up to 4 x M20 or M25 ISO Ex d/Ex ia Up to 4 x ½" or ¾" NPT UL Stainless steel version comes with two entries as standard. Units ordered with a single entry ordering code are supplied with 2x entries inc. plug on the opposite side
Terminals	Will accept up to 1·5mm² cable
Resistor values	470R minimum (d.c. & I.S. units only)

General arrangement drawing (all dimensions in mm)

Break glass

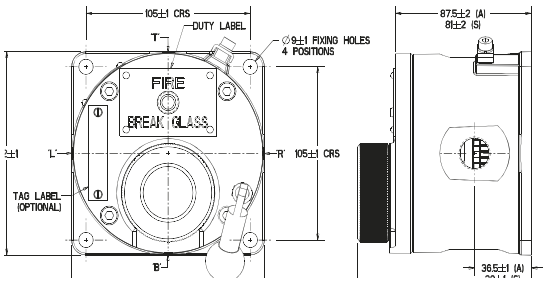

Push button

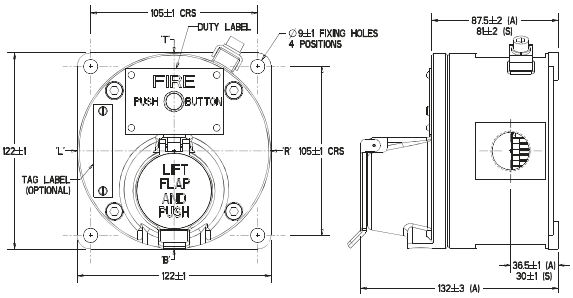

Both the Ex ia units and the Ex d units have the same external appearance. Also the internal components are identical throughout the range. Each unit can be wired for either NO, NC or CO contacts to customer specification

Ordering requirements

The following code is designed to help in selection of the correct unit. Build up the reference number by inserting the code for each component into the appropriate box

Unit	Model	Material	Certification	Entries	Duty label	Tag label	Options	Finish
SM87	PBL	S	D	1B1R	O	Y	HD	R

Material*	Code
Stainless steel	S
Alloy	A

*UL version only available in alloy

Model*	Code
Breakglass latching	BGL
Lift flap breakglass latching	LBGL
Push button latching key reset	PBL
Push button only momentary action	PBM

*UL and ULC versions only available in PBL model

Certification	Code
Ex ia	I
Ex d	D
IECEx - Ex ia	IJ
IECEx - Ex d	DJ
UL	UL
ULC	UC
CSA - Intrinsically Safe	IC
CSA - Ex proof	DC
INMETRO - Ex d	DM
CCC	DQ

Entries	Code
M20	1
M25	2
½" NPT	3
¾" NPT	4
Other	5
Position	
Top	*T
Bottom	*B
RHS	*R
LHS	*L

*Prefix position with size code i.e. 1T1B = M20 Top and Bottom

Duty label	Code
Fire breakglass	1
Push button	2
Fire push button	3
ESDO abandon	4
Burning house logo	5
Fire/FEU	6†
Other	O*
None	N

*Please specify
†This option must be used when ordering a red callpoint for ULC Fire Alarm applications

Tag label	Code
Required	Y*
Not required	N

*Please specify

Options	Code
Not required	N
LED	A
Resistor series	G*
Resistor EOL	H*
Diode	D*
3 pole c/o switch	T
4 pole c/o switch	F

*Please specify

Finish	Code
Red	R
Blue	B
Yellow	Y
Yellow/black stripes	X
Special	S*

*Please specify

PUSH BUTTON TO SIS

POS.	TAG NUMBER	SERVICE	DUTY LABEL
1	950-ASD-01101	FZ-01 ABANDON SHUTDOWN ACTIVATION	ABANDON ACTIVATION
2	950-ASD-03101	FZ-03 ABANDON SHUTDOWN ACTIVATION	ABANDON ACTIVATION
3	950-ASD-04101	FZ-04 ABANDON SHUTDOWN ACTIVATION	ABANDON ACTIVATION
4	950-ASD-06101	FZ-06 ABANDON SHUTDOWN ACTIVATION	ABANDON ACTIVATION
5	950-ASD-07101	FZ-07 ABANDON SHUTDOWN ACTIVATION	ABANDON ACTIVATION
6	950-MOB-01101	FZ-01 MAN OVER BOARD ACTIVATION	MAN OVER BOARD ACTIVATION
7	950-MOB-03101	FZ-03 MAN OVER BOARD ACTIVATION	MAN OVER BOARD ACTIVATION
8	950-MOB-04101	FZ-04 MAN OVER BOARD ACTIVATION	MAN OVER BOARD ACTIVATION
9	950-MOB-06101	FZ-06 MAN OVER BOARD ACTIVATION	MAN OVER BOARD ACTIVATION
10	950-MOB-07101	FZ-07 MAN OVER BOARD ACTIVATION	MAN OVER BOARD ACTIVATION
11	950-ESD-01101	FZ-01 ESD-1 PUSH BUTTON ACTIVATION	EMERGENCY SHUTDOWN ACTIVATION
12	950-ESD-03101	FZ-03 ESD-1 PUSH BUTTON ACTIVATION	EMERGENCY SHUTDOWN ACTIVATION
13	950-ESD-04101	FZ-04 ESD-1 PUSH BUTTON ACTIVATION	EMERGENCY SHUTDOWN ACTIVATION
14	950-ESD-06101	FZ-06 ESD-1 PUSH BUTTON ACTIVATION	EMERGENCY SHUTDOWN ACTIVATION
15	950-ESD-07101	FZ-07 ESD-1 PUSH BUTTON ACTIVATION	EMERGENCY SHUTDOWN ACTIVATION
16	950-ESDD-01101	FZ-01 ESD-1D PUSH BUTTON ACTIVATION	EMERGENCY SHUTDOWN DEPRESSURIZATION ACTIVATION
17	950-ESDD-03101	FZ-03 ESD-1D PUSH BUTTON ACTIVATION	EMERGENCY SHUTDOWN DEPRESSURIZATION ACTIVATION
18	950-ESDD-04101	FZ-04 ESD-1D PUSH BUTTON ACTIVATION	EMERGENCY SHUTDOWN DEPRESSURIZATION ACTIVATION
19	950-ESDD-06101	FZ-06 ESD-1D PUSH BUTTON ACTIVATION	EMERGENCY SHUTDOWN DEPRESSURIZATION ACTIVATION
20	950-ESDD-07101	FZ-07 ESD-1D PUSH BUTTON ACTIVATION	EMERGENCY SHUTDOWN DEPRESSURIZATION ACTIVATION

File: 1724000821-IN-DS-00004-02.xlsx
This document undergoes an issuance cycle within EDMS "Fusionlive".
Its distribution is electronically controlled. Once printed shall be considered as "NOT CONTROLLED" copy

SM87BG & SM87PB manual call point range

Ex d, Ex ia, weatherproof



Overview

These manual fire alarm, emergency shutdown break-glass and pushbutton units have been designed for the most arduous environmental conditions.

The units are both easy to install and maintain. Intrinsically safe Ex ia and flameproof Ex d versions of each model are available.

A choice of either stainless steel or alloy makes the range suitable for either the offshore or onshore industries. Stainless steel, one of the most durable materials available on the market, is both hard wearing and corrosion resistant, increasing the life of products in harsh environments and therefore reducing maintenance costs.

Features

- Zone 0, Zone 1 and Zone 2 use*
- ATEX certified
- UL listed for USA and Canada (SM87PBL only). Class I, Div 1, Groups C & D
- ULC certified (SM87PBL only) for Class I, Zone 1 Groups C & D
- CSA certified
- IECEx certified
- Brazilian (INMETRO) certified
- Russian Fire certified
- PESO certified (Ex d only)
- SIL 2 certified (SM87PB only)
- IP66 and IP67
- DNV type approval (IEC 60945) (SM87PB only)
- Certified temperature: –55°C to +70°C*
- Stainless steel or marine grade alloy
- Robust yet lightweight
- Easy to maintain

*Model dependent

Eaton
Unit B, Sutton Parkway
Oddicroft Lane
Sutton in Ashfield
United Kingdom
NG17 5FB

T: +44 (0) 1623 444 400
www.crouse-hinds.com/hac
MEDCSales@Eaton.com

© 2024 Eaton
All Rights Reserved
Printed in UK
Publication
No.DSMC0005/H
March 2024

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

Powering Business Worldwide

All specifications, dimensions, weights and tolerances are nominal (typical) and Eaton reserve the right to vary all data without prior notice.
No liability is accepted for any consequence of use.

Certifications


ATEX Ex d	Cert. no. Baseefa03ATEX0075. ATEX Approved Ex II 2GD Certified to: EN60079-0, EN60079-1, EN60079-31 Ex d IIC T5/T6 Gb, Ex tb IIIC T85°C/T100°C Db. IP66/IP67
ATEX Ex ia	Cert no. Baseefa 02ATEX0152X. ATEX Approved Ex II 1GD Certified to: EN60079-0, EN60079-11 Ex ia IIC T4 Ga, Ex ia IIIC T135°C Da
IECEx Ex d	Cert. no. IECEx BAS 09.0060 Certified to: EN60079-0, EN60079-1, EN60079-31 Ex d IIC T5/T6 Gb, Ex tb IIIC T85°/T100°C Db. IP66/IP67
IECEx Ex ia	Cert. no. IECEx BAS 10.0033X Certified to: IEC60079-0, IEC60079-11, Ex ia IIC T4 Ga, Ex ia IIIC T135°C Da
UL	Listing no. E186629 UL listed to Class 1, Div 1. Groups C & D. (SM87PBL)
ULC	Cert. no. 20091023-E320282 ULC certified for Class I, Zone 1 Groups C & D (SM87PBL)
CSA Explosion proof	Class 1, Div 1 & 2. Group D Ex d IIC T5/T6 Gb
CSA Intrinsically safe	Class 1, Div 1 & 2. Groups A-D
INMETRO Ex d	Ex db IIC T5/T6 Gb
Type Approvals	DNV (IEC 60945) (Stainless Steel SM87PB only)
SIL	SM87PB only - SIL2 Certification to IEC61508. Cert no. 20151118-4786827453
CCC	Ex d IIC T5/T6 Gb, Ex tD A21 IP66/IP67 T85°C/T100°C

Specifications


Material	Grade 316 ANC4B stainless steel or LM 25 TF marine grade alloy
Finish	Paint finish as standard or to customer specification
Voltage	Ex d 24V a.c./d.c. Ex ia 28V
Rating	2A
Switches	2 pole c/o, wired to terminals Optional up to 4 pole (UL version 2 pole only)
Optional indicator	A red high intensity LED can be fitted for alarm indication As standard the LED is not provided with over current protection. The forward current (If) should be limited to 20mA
Certified temp	Ex d* –55°C to +70°C. Ex ia* –55°C to +60°C –20°C to +55°C (LED version only) UL –40°C to +70°C, –20°C to +55°C (LED version only) CSA Explosion proof - Class 1, Div 1 & 2. –50°C to +55°C CSA - Ex d IIC –55°C to +70°C CSA Intrinsically safe - Class 1, Div 1 & 2 –50°C to +40°C *Note: includes ATEX, IECEx & INMETRO versions
Weight	3·8 kg. steel (approx.) or 2.5 kg. alloy (approx)
Ingress protection	IP66 & IP67. SM87PB IP68 (35m for 40 hours)
Entries	Up to 4 x M20 or M25 ISO Ex d/Ex ia Up to 4 x ½" or ¾" NPT UL Stainless steel version comes with two entries as standard. Units ordered with a single entry ordering code are supplied with 2x entries inc. plug on the opposite side
Terminals	Will accept up to 1·5mm² cable
Resistor values	470R minimum (d.c. & I.S. units only)

General arrangement drawing (all dimensions in mm)

Break glass

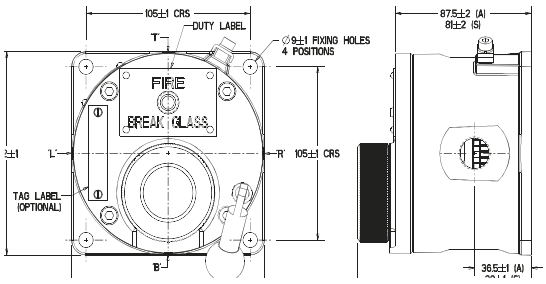

Push button

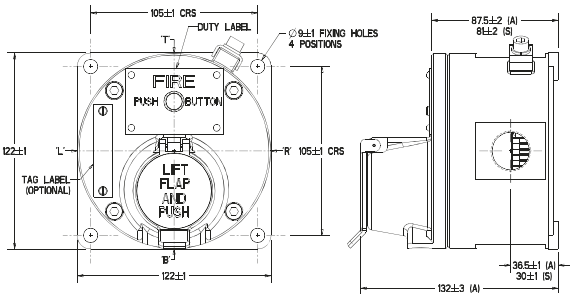

Both the Ex ia units and the Ex d units have the same external appearance. Also the internal components are identical throughout the range. Each unit can be wired for either NO, NC or CO contacts to customer specification

Ordering requirements

The following code is designed to help in selection of the correct unit. Build up the reference number by inserting the code for each component into the appropriate box

Unit	Model	Material	Certification	Entries	Duty label	Tag label	Options	Finish
SM87	PBL	S	D	1B1R	O	Y	HD	Y

Material*	Code
Stainless steel	S
Alloy	A

*UL version only available in alloy

Model*	Code
Breakglass latching	BGL
Lift flap breakglass latching	LBGL
Push button latching key reset	PBL
Push button only momentary action	PBM

*UL and ULC versions only available in PBL model

Certification	Code
Ex ia	I
Ex d	D
IECEx - Ex ia	IJ
IECEx - Ex d	DJ
UL	UL
ULC	UC
CSA - Intrinsically Safe	IC
CSA - Ex proof	DC
INMETRO - Ex d	DM
CCC	DQ

Entries	Code
M20	1
M25	2
½" NPT	3
¾" NPT	4
Other	5
Position	
Top	*T
Bottom	*B
RHS	*R
LHS	*L

*Prefix position with size code i.e. 1T1B = M20 Top and Bottom

Duty label	Code
Fire breakglass	1
Push button	2
Fire push button	3
ESDO abandon	4
Burning house logo	5
Fire/FEU	6†
Other	O*
None	N

*Please specify
†This option must be used when ordering a red callpoint for ULC Fire Alarm applications

Tag label	Code
Required	Y*
Not required	N

*Please specify

Options	Code
Not required	N
LED	A
Resistor series	G*
Resistor EOL	H*
Diode	D*
3 pole c/o switch	T
4 pole c/o switch	F

*Please specify

Finish	Code
Red	R
Blue	B
Yellow	Y
Yellow/black stripes	X
Special	S*

*Please specify

GAS FLASH BEACON (AMBER)

POS.	TAG NUMBER	SERVICE	DUTY LABEL
1	950-XL-01101	FZ-01 GAS BEACON ACTIVATION	FLAMMABLE GAS ALARM
2	950-XL-02101	FZ-02 GAS BEACON ACTIVATION	FLAMMABLE GAS ALARM
3	950-XL-03101	FZ-03 GAS BEACON ACTIVATION	FLAMMABLE GAS ALARM
4	950-XL-03103	FZ-03 GAS BEACON ACTIVATION	FLAMMABLE GAS ALARM
5	950-XL-04101	FZ-04 GAS BEACON ACTIVATION	FLAMMABLE GAS ALARM
6	950-XL-04103	FZ-04 GAS BEACON ACTIVATION	FLAMMABLE GAS ALARM
7	950-XL-04201	FZ-04 GAS BEACON ACT. - B-400 INDOOR	FLAMMABLE GAS ALARM
8	950-XL-04203	FZ-04 GAS BEACON ACT. - B-300 INDOOR	FLAMMABLE GAS ALARM
9	950-XL-04205	FZ-04 GAS BEACON ACT. - B-200 INDOOR	FLAMMABLE GAS ALARM
10	950-XL-06101	FZ-06 GAS BEACON ACTIVATION	FLAMMABLE GAS ALARM
11	950-XL-06103	FZ-06 GAS BEACON ACTIVATION	FLAMMABLE GAS ALARM
12	950-XL-06201	FZ-06 GAS BEACON ACT. - B-100 INDOOR	FLAMMABLE GAS ALARM
13	950-XL-07101	FZ-07 GAS BEACON ACTIVATION	FLAMMABLE GAS ALARM

File: 1724000821-IN-DS-00004-02.xlsx
This document undergoes an issuance cycle within EDMS "Fusionlive".
Its distribution is electronically controlled. Once printed shall be considered as "NOT CONTROLLED" copy

SM87HXB 5 joule xenon and SM87LED high intensity LED beacon range

Ex d, weatherproof



Overview

These certified beacons have been designed for use in harsh environmental conditions. The stainless steel or marine grade alloy enclosures are suitable for use offshore or onshore, where lightweight combined with corrosion resistance and strength is required. Units can be painted to customer specification and fitted with identification labels.

LED version available, offering extended lifetimes.

Stainless steel, one of the most durable materials available on the market, is both hard wearing and corrosion resistant, increasing the life of products in harsh environments and therefore reducing maintenance costs.

Features

- Zone 1 and Zone 2 use
- Ex d IIC T4/T5/T6
- ATEX approved, Ex II 2GD
- IECEx certified Gb, Db
- UL listed for USA and Canada
  - Class I, Div 1, Groups C & D
  - Class I, Zone 1, AExd IIB
- CSA certified
- CQST certified*
- INMETRO certified*
- SIL 2 certified
- CCOE certified
- IP66 and IP67
- Certified temperature: –55°C to +70°C*
- Stainless steel or marine grade alloy
- Xenon or LED versions
- Various lens colours
- Optional lens guard
- Telephone or relay initiated

*Depending on version

Eaton
Unit B, Sutton Parkway
Oddicroft Lane
Sutton in Ashfield
United Kingdom
NG17 5FB

T: +44 (0) 1623 444 400
www.crouse-hinds.com/hac
MEDCSales@Eaton.com

© 2024 Eaton
All Rights Reserved
Printed in UK
Publication
No.DSMC0041/F
March 2024

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

All specifications, dimensions, weights and tolerances are nominal (typical) and Eaton reserve the right to vary all data without prior notice. No liability is accepted for any consequence of use.


Certifications

ATEX Ex d	Cert. no. Baseefa 03ATEX0222 Certified to: EN60079-0, EN60079-1, EN60079-31 SM87HXB: Ex II 2GD, Ex d IIC T5/T6 Gb, Ex tb IIIC T65°C/ T80°C/ T95°C Db SM87LED: Ex II 2GD, Ex d IIC T6 Gb, Ex tb IIIC T55°C/ T70°C Db
IECEx Ex d	Cert. no. IECEx BAS 09.0059 Certified to: IEC60079-0, IEC60079-1, IEC60079-31 SM87HXB: Ex d IIC T5/T6 Gb, Ex tb IIIC T65°C/ T80°C/ T95°C Db SM87LED: Ex d IIC T6 Gb, Ex tb IIIC T55°C/ T70°C Db
UL	Listing no. E187894 Class I, Div 1, Groups C & D Class I, Zones 1. (SM87HXB & SM87XBT only)
CSA	Cert no. 96406. (SM87HXB only) Certified to: C22.2 Nos 0, 0.4, 0.5, 9, 30-M1986, 94-M91, 137-M1981 Class I, Div 1. Group D
INMETRO Ex d	SM87HXB: Ex db IIC T5/T6 Gb, Ex tb IIIC T80°C/T95°C Db SM87LED: Ex db IIC T6 Gb, Ex tb IIIC T70°C Db
CQST Ex d	SM87HXB: Ex d IIC T5/T6 Gb, Ex tb IIIC T65°C/ T80°C/ T95°C Db
SIL	SIL2 certification to IEC61508. Cert. No. 20151119-4786827453

Specifications

Material	SM87HXBS and SM87LEDS: Grade 316 ANC4B stainless steel SM87HXBA and SM87LEDA: LM25 TF marine grade alloy Lens: glass UL version available only in marine grade alloy
Finish	Epoxy paint finish as standard
Certified temp	SM87HXB: ATEX, IECEx, CQST, INMETRO -55°C to +70°C (T5) -55°C to +55°C (T6) UL -55°C to +70°C CSA -50°C to +40°C SM87LED: ATEX, IECEx, CQST, INMETRO -55°C to +55°C* (T6) * Operating temperature is -20°C to +55°C
Weight	SM87HXBS & SM87LEDS: 3.8kg each (approx) SM87HXBA & SM87LEDA: 2kg. each (approx)
Ingress protection	IP66 & IP67
Entries	Up to 4 x M20 / M25 ISO or 1/2" / 3/4" NPT
Terminals	SM87HXB SM87LED: Terminal suitable for 2.5mm2 cable
Relay initiate	Initiation by telephone ringing tone or low voltage control signals
Labels	Duty & tag labels optional

General arrangement drawing (all dimensions in mm)

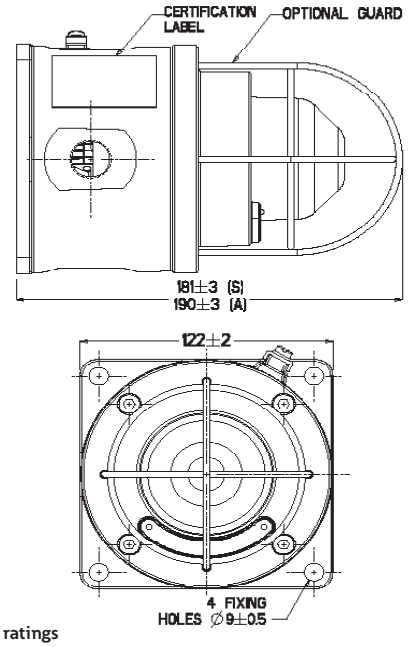

Electrical ratings

	d.c.		a.c. 50/60Hz				
Voltage	24	48	110	120	220	240	254
Tube energy (Joules) SM87HXB	5	5	6	7	6	7	8
Current consumption SM87HXB	393	175	250	275	120	135	153
Current consumption SM87LED (mA)	165	85	N/A	N/A	N/A	N/A	N/A
Effective intensity (Cd)	29	29	32	39	32	39	44
Peak intensity (Cd)	22213	22213	25061	30187	25061	30187	34174

NOTE: The above figures (Cd) are for a clear lens @ 1Hz flash rate

Multiplying factor for coloured lenses

Red	Blue	Amber	Green	Yellow
0.15	0.12	0.51	0.49	0.36

The photometric data given above has been verified by BSI. Reports are available if required

LED light output - steady or flashing (customer selectable)

	Red	Blue	Amber	Green
Total LED output (candela)	192	64	64	17

LED/lens colour: red, blue, green, amber, yellow (not LED) or clear
Flash rate: 90fpm as standard, other flash rates available on request

Flash rate: 60fpm

Ordering requirements

The following code is designed to help in selection of the correct unit. Build up the reference number by inserting the code for each component into the appropriate box

Model	Certification	Voltage	Lens/LED colour	Guard	Entries	Tag/duty	Options	Finish
SM87LEDS	B	024	A	Y	1B1R	Y	N	R

Model

Voltage	Code
Xenon (stainless steel)	SM87HXBS
Xenon (alloy)	SM87HXBA
LED Exd (stainless steel)	SM87LEDS
LED Exd (alloy)	SM87LEDA

Certification

Certification	Code
ATEX	B
IECEx	J
UL	UL†
CSA	C‡
Chinese(CQST)	Q
INMETRO	DM

† Only SM87HXBA is available UL certified
‡ Only SM87HXB

Voltage

Voltage	Code
24 V d.c.	024
48 V d.c.	048
110 V a.c. not LED	110
120 V a.c. not LED	120
220 V a.c. not LED	220
240 V a.c. not LED	240
254 V a.c. not LED	254

Lens/LED colour

Colour	Code
Clear	C
Red	R
Blue	B
Green	G
Amber	A
Yellow (not LED)	Y

Guard

Guard	Code
None	N
Yes	Y

Entries

Entries	Code
M20	1
M25	2
1/2" NPT	3
3/4" NPT	4
Top	*T
Bottom	*B
RHS	*R
LHS	*L

* Prefix position with entry size code
e.g. 1T1B=M20 Top and Bottom entries

Tag/duty

Label	Code
None	N
Yes	Y*

* Please specify wording (Note: 15 characters maximum)

Options

Options	Code
Telephone	T*‡
Relay	R*‡
EOL resistor	E*†
None	N

* Not available on UL versions
† Please specify
‡ For SM87LED please specify if steady or flashing is required

Finish

Colour	Code
Red	R
Blue	B
Yellow	Y
Yellow/ black stripe	X
Grey	G
White	W
Special	S*

*Please specify

FIRE FLASH BEACON (RED)

POS.	TAG NUMBER	SERVICE	DUTY LABEL
1	950-XL-01102	FZ-01 FIRE BEACON ACTIVATION	FIRE ALARM
2	950-XL-02102	FZ-02 FIRE BEACON ACTIVATION	FIRE ALARM
3	950-XL-03102	FZ-03 FIRE BEACON ACTIVATION	FIRE ALARM
4	950-XL-03104	FZ-03 FIRE BEACON ACTIVATION	FIRE ALARM
5	950-XL-04102	FZ-04 FIRE BEACON ACTIVATION	FIRE ALARM
6	950-XL-04104	FZ-04 FIRE BEACON ACTIVATION	FIRE ALARM
7	950-XL-04202	FZ-04 FIRE BEACON ACT. - B-400 INDOOR	FIRE ALARM
8	950-XL-04204	FZ-04 FIRE BEACON ACT. - B-300 INDOOR	FIRE ALARM
9	950-XL-04206	FZ-04 FIRE BEACON ACT. - B-200 INDOOR	FIRE ALARM
10	950-XL-06102	FZ-06 FIRE BEACON ACTIVATION	FIRE ALARM
11	950-XL-06104	FZ-06 FIRE BEACON ACTIVATION	FIRE ALARM
12	950-XL-06202	FZ-06 FIRE BEACON ACT. - B-100 INDOOR	FIRE ALARM
13	950-XL-07102	FZ-07 FIRE BEACON ACTIVATION	FIRE ALARM

File: 1724000821-IN-DS-00004-02.xlsx
This document undergoes an issuance cycle within EDMS "Fusionlive".
Its distribution is electronically controlled. Once printed shall be considered as "NOT CONTROLLED" copy

SM87HXB 5 joule xenon and SM87LED high intensity LED beacon range

Ex d, weatherproof



Overview

These certified beacons have been designed for use in harsh environmental conditions. The stainless steel or marine grade alloy enclosures are suitable for use offshore or onshore, where lightweight combined with corrosion resistance and strength is required. Units can be painted to customer specification and fitted with identification labels.

LED version available, offering extended lifetimes.

Stainless steel, one of the most durable materials available on the market, is both hard wearing and corrosion resistant, increasing the life of products in harsh environments and therefore reducing maintenance costs.

Features

- Zone 1 and Zone 2 use
- Ex d IIC T4/T5/T6
- ATEX approved, Ex II 2GD
- IECEx certified Gb, Db
- UL listed for USA and Canada
  - Class I, Div 1, Groups C & D
  - Class I, Zone 1, AExd IIB
- CSA certified
- CQST certified*
- INMETRO certified*
- SIL 2 certified
- CCOE certified
- IP66 and IP67
- Certified temperature: –55°C to +70°C*
- Stainless steel or marine grade alloy
- Xenon or LED versions
- Various lens colours
- Optional lens guard
- Telephone or relay initiated

*Depending on version

Eaton
Unit B, Sutton Parkway
Oddicroft Lane
Sutton in Ashfield
United Kingdom
NG17 5FB

T: +44 (0) 1623 444 400
www.crouse-hinds.com/hac
MEDCSales@Eaton.com

© 2024 Eaton
All Rights Reserved
Printed in UK
Publication
No.DSMC0041/F
March 2024

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

Powering Business Worldwide

All specifications, dimensions, weights and tolerances are nominal (typical) and Eaton reserve the right to vary all data without prior notice.
No liability is accepted for any consequence of use.


Certifications

ATEX Ex d	Cert. no. Baseefa 03ATEX0222 Certified to: EN60079-0, EN60079-1, EN60079-31 SM87HXB: Ex II 2GD, Ex d IIC T5/T6 Gb, Ex tb IIIC T65°C/ T80°C/ T95°C Db SM87LED: Ex II 2GD, Ex d IIC T6 Gb, Ex tb IIIC T55°C/ T70°C Db
IECEx Ex d	Cert. no. IECEx BAS 09.0059 Certified to: IEC60079-0, IEC60079-1, IEC60079-31 SM87HXB: Ex d IIC T5/T6 Gb, Ex tb IIIC T65°C/ T80°C/ T95°C Db SM87LED: Ex d IIC T6 Gb, Ex tb IIIC T55°C/ T70°C Db
UL	Listing no. E187894 Class I, Div 1, Groups C & D Class I, Zones 1. (SM87HXB & SM87XBT only)
CSA	Cert no. 96406. (SM87HXB only) Certified to: C22.2 Nos 0, 0.4, 0.5, 9, 30-M1986, 94-M91, 137-M1981 Class I, Div 1. Group D
INMETRO Ex d	SM87HXB: Ex db IIC T5/T6 Gb, Ex tb IIIC T80°C/T95°C Db SM87LED: Ex db IIC T6 Gb, Ex tb IIIC T70°C Db
CQST Ex d	SM87HXB: Ex d IIC T5/T6 Gb, Ex tb IIIC T65°C/ T80°C/ T95°C Db
SIL	SIL2 certification to IEC61508. Cert. No. 20151119-4786827453

Specifications

Material	SM87HXBS and SM87LEDS: Grade 316 ANC4B stainless steel SM87HXBA and SM87LEDA: LM25 TF marine grade alloy Lens: glass UL version available only in marine grade alloy
Finish	Epoxy paint finish as standard
Certified temp	SM87HXB: ATEX, IECEx, CQST, INMETRO -55°C to +70°C (T5) -55°C to +55°C (T6) UL -55°C to +70°C CSA -50°C to +40°C SM87LED: ATEX, IECEx, CQST, INMETRO -55°C to +55°C* (T6) * Operating temperature is -20°C to +55°C
Weight	SM87HXBS & SM87LEDS: 3.8kg each (approx) SM87HXBA & SM87LEDA: 2kg. each (approx)
Ingress protection	IP66 & IP67
Entries	Up to 4 x M20 / M25 ISO or 1/2" / 3/4" NPT
Terminals	SM87HXB SM87LED: Terminal suitable for 2.5mm2 cable
Relay initiate	Initiation by telephone ringing tone or low voltage control signals
Labels	Duty & tag labels optional

General arrangement drawing (all dimensions in mm)

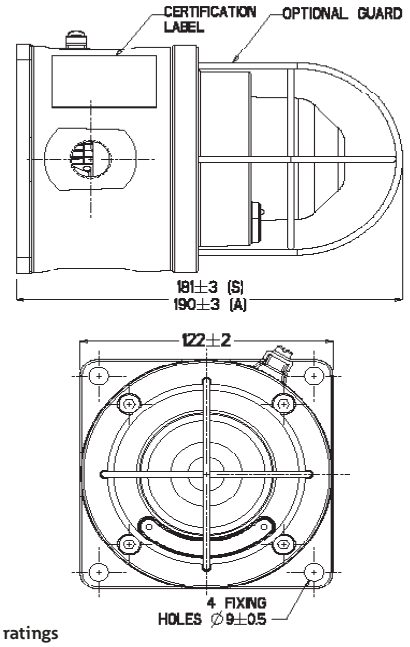

Electrical ratings

	d.c.		a.c. 50/60Hz				
Voltage	24	48	110	120	220	240	254
Tube energy (Joules) SM87HXB	5	5	6	7	6	7	8
Current consumption SM87HXB	393	175	250	275	120	135	153
Current consumption SM87LED (mA)	165	85	N/A	N/A	N/A	N/A	N/A
Effective intensity (Cd)	29	29	32	39	32	39	44
Peak intensity (Cd)	22213	22213	25061	30187	25061	30187	34174

NOTE: The above figures (Cd) are for a clear lens @ 1Hz flash rate

Multiplying factor for coloured lenses

Red	Blue	Amber	Green	Yellow
0.15	0.12	0.51	0.49	0.36

The photometric data given above has been verified by BSI. Reports are available if required

LED light output - steady or flashing (customer selectable)

	Red	Blue	Amber	Green
Total LED output (candela)	192	64	64	17

LED/lens colour: red, blue, green, amber, yellow (not LED) or clear
Flash rate: 90fpm as standard, other flash rates available on request

Flash rate: 60fpm

Ordering requirements

The following code is designed to help in selection of the correct unit. Build up the reference number by inserting the code for each component into the appropriate box

Model	Certification	Voltage	Lens/LED colour	Guard	Entries	Tag/duty	Options	Finish
SM87LEDS	B	024	R	Y	1B1R	Y	N	R

Voltage	Code
Xenon (stainless steel)	SM87HXBS
Xenon (alloy)	SM87HXBA
LED Exd (stainless steel)	SM87LEDS
LED Exd (alloy)	SM87LEDA

Voltage	Code
24 V d.c.	024
48 V d.c.	048
110 V a.c. not LED	110
120 V a.c. not LED	120
220 V a.c. not LED	220
240 V a.c. not LED	240
254 V a.c. not LED	254

Guard	Code
None	N
Yes	Y

Label	Code
None	N
Yes	Y*

* Please specify wording (Note: 15 characters maximum)

Colour	Code
Red	R
Blue	B
Yellow	Y
Yellow/ black stripe	X
Grey	G
White	W
Special	S*

*Please specify

Certification	Code
ATEX	B
IECEx	J
UL	UL†
CSA	C‡
Chinese(CQST)	Q
INMETRO	DM

† Only SM87HXBA is available UL certified
‡ Only SM87HXB

Colour	Code
Clear	C
Red	R
Blue	B
Green	G
Amber	A
Yellow (not LED)	Y

Entries	Code
M20	1
M25	2
1/2" NPT	3
3/4" NPT	4
Top	*T
Bottom	*B
RHS	*R
LHS	*L

* Prefix position with entry size code
e.g. 1T1B=M20 Top and Bottom entries

Options	Code
Telephone	T*‡
Relay	R*‡
EOL resistor	E*†
None	N

* Not available on UL versions
† Please specify
‡ For SM87LED please specify if steady or flashing is required

SOUNDER

POS.	TAG NUMBER	SERVICE	DUTY LABEL
1	950-XZ-01101	FZ-01 SOUNDER ACTIVATION	EMERGENCY SHUTDOWN ALARM
2	950-XZ-01102	FZ-01 SOUNDER ACTIVATION	EMERGENCY SHUTDOWN ALARM
3	950-XZ-02101	FZ-02 SOUNDER ACTIVATION	EMERGENCY SHUTDOWN ALARM
4	950-XZ-03101	FZ-03 SOUNDER ACTIVATION	EMERGENCY SHUTDOWN ALARM
5	950-XZ-03102	FZ-03 SOUNDER ACTIVATION	EMERGENCY SHUTDOWN ALARM
6	950-XZ-04101	FZ-04 SOUNDER ACTIVATION	EMERGENCY SHUTDOWN ALARM
7	950-XZ-04102	FZ-04 SOUNDER ACTIVATION	EMERGENCY SHUTDOWN ALARM
8	950-XZ-04201	FZ-04 SOUNDER ACT. - B-400 INDOOR	EMERGENCY SHUTDOWN ALARM
9	950-XZ-04202	FZ-04 SOUNDER ACT. - B-300 INDOOR	EMERGENCY SHUTDOWN ALARM
10	950-XZ-04203	FZ-04 SOUNDER ACT. - B-200 INDOOR	EMERGENCY SHUTDOWN ALARM
11	950-XZ-05101	FZ-05 SOUNDER ACTIVATION	EMERGENCY SHUTDOWN ALARM
12	950-XZ-05102	FZ-05 SOUNDER ACTIVATION	EMERGENCY SHUTDOWN ALARM
13	950-XZ-05103	FZ-05 SOUNDER ACTIVATION	EMERGENCY SHUTDOWN ALARM
14	950-XZ-05104	FZ-05 SOUNDER ACTIVATION	EMERGENCY SHUTDOWN ALARM
15	950-XZ-06101	FZ-06 SOUNDER ACTIVATION	EMERGENCY SHUTDOWN ALARM
16	950-XZ-06201	FZ-06 SOUNDER ACT. - B-100 INDOOR	EMERGENCY SHUTDOWN ALARM
17	950-XZ-07101	FZ-07 SOUNDER ACTIVATION	EMERGENCY SHUTDOWN ALARM

File: 1724000821-IN-DS-00004-02.xlsx
This document undergoes an issuance cycle within EDMS "Fusionlive".
Its distribution is electronically controlled. Once printed shall be considered as "NOT CONTROLLED" copy

DB3BM sounders range up to 116dB

Ex d, weatherproof



Overview

The DB3BM is a high power explosion proof sounder, introduced as a replacement for the current DB1 / DB1H with improved functionality and performance. Certified for use in a wide range of temperatures from -60°C to +85°C the Ex enclosure is manufactured in either marine grade alloy or stainless steel with a rugged thermoplastic flare providing a corrosion free and aesthetically pleasing product.

Capable of producing 116 dB @ 1m and with a range of pre-recorded tones, the DB3BM includes an integral volume control which is ideal when a lower output is required.

The unit is provided with versatile control options allowing compatibility with a wide range of control methods and PLCs.

The standard DC unit provides 3 tone stages, each stage has 28 tones available which can be independently selected. The unit can be controlled by reversing the polarity of the power supply (2 stage) or providing a common negative and switching between multiple positive supplies.

The DB3BM proves its versatility by additionally being able to work with a common positive supply and switching the negatives. The tone stages of the DB3BM can also be controlled via voltage free contacts provided by a control panel.

The flexibility of the range continues with a wide range of supply voltages. The short flare option is a worthy addition to the range offering a high SPL in a compact unit.

Features

- UKEX / ATEX / IECEx
  Ex db IIC T4/T5/T6 Gb
  Ex tb IIIC T4/T5/T6 Db
- Certified temperature: –60°C to +85°C
- IP66 & IP67 (terminal only)
- Up to 116 dB output @ 1 m
- Integral volume control
- 28 tones, user selectable
- 3 stage unit remotely switchable
- Tones can be programmed to customer's specification
- DC supply voltage between 12 V and 48 V
- End of line resistor option
- Sounder & beacon combination units available, for further details contact MEDC
- Ex enclosure – marine grade alloy or stainless steel
- Flare - high impact thermoplastic polyester
- Stainless steel mounting bracket and cover screws
- Mounting bracket has ratchet facility as standard
- Swivel bracket standard on Stainless steel unit, optional on Alloy units



Stainless steel body, short flare version

ATEX IECEx UKCA

Eaton
Unit B, Sutton Parkway
Oddicroft Lane
Sutton in Ashfield
United Kingdom
NG17 5FB

T: +44 (0) 1623 444 400
www.crouse-hinds.com/hac
MEDCSales@Eaton.com

Powering Business Worldwide

© 2022 Eaton
All Rights Reserved
Printed in UK
Publication
No.DSMC0032/B
March 2022

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

All specifications, dimensions, weights and tolerances are nominal (typical) and Eaton reserve the right to vary all data without prior notice.
No liability is accepted for any consequence of use.

Certifications

ATEX Ex db	Cert. no. UL 21 ATEX02559X. Certified to: EN IEC 60079-0, EN 60079-1, 31 Ex II 2GD, Ex db IIC T3/T4/T5/T6 Gb, Ex tb IIIC T200°C/T135°C/T100°C/T85°C Db, IP66 (IP65 short flare)
IECEx Ex db	Cert. no. IECEx ULD 21.0017X. Certified to: IEC60079-0,1,31 Ex db IIC T3/T4/T5/T6 Gb, Ex tb IIIC T200°C/T135°C/T100°C/T85°C Db, IP66 (IP65 short flare)
UKEX Ex db	Cert. no. UL21UKEX2209X. Certified to: EN IEC 60079-0, EN 60079-1, 31 Ex II 2GD, Ex db IIC T3/T4/T5/T6 Gb, Ex tb IIIC T200°C/T135°C/T100°C/T85°C Db IP66 (IP65 short flare)
Safe Area	EN 61010-1, EN 60529, EN61000-6

Specifications

Material	Ex enclosure – marine grade alloy or stainless steel Flare - flame retardant, high impact, UV stable, thermoplastic polyester (UV stability tested to ISO 4892 part 3) Hardware - bracket, fixings and captive cover screws in 316 stainless steel
Fire retardancy	Outer flare - thermoplastic polyester. V0 flammability rating
Finish	Body – alloy: painted black. Stainless steel: painted black. Flare - natural black, natural red or painted as specified
Voltage	DC: 12 - 48 V. AC: Up to 254 V. if using EOL resistor/s the maximum power dissipation must be limited to 3 W.
Weight	Alloy - 4.4 kg, stainless steel 8.35 kg based on long flare DC unit
Ingress protection	IP66 & IP67 (terminal only). IP65 short flare
Entries	Up to 2 x M20 or M25 or ½"or ¾" NPT. Blanking plug available
Terminals	AC: 4 x 1.5mm² (loop in / out power), 3 x 2.5mm² (tone selection) (standard unit only) DC: 8 x 2.5mm² (8 for loop in / out power and tone selection) (standard unit only)
Mounting arrangement	Stainless steel bracket with ratchet facility, optional swivel bracket available. Swivel standard on stainless steel unit
Labels	Optional duty and tag labels available
Tone information	28 tones per stage. Additional custom tones available (contact MEDC) Suitable for use with 200 Hz tones
Relative Humidity	99% Non-condensing

Tone activation and selection

Voltage	Unit	No.of stages	Tone activation	Tone selection
DC	Standard	1	Apply power	1 x DIP switch
		2	Reverse polarity	2 x DIP switches
			Common -ve with 2 +ve supplies	2 x DIP switches
			*Common +ve with 2 -ve supplies	2 x DIP switches
		3	Common -ve with 3 +ve supplies	3 x DIP switches
	Alternative tone activation (Option M)	2	*Common -ve with 2 +ve supplies	2 x DIP switches
		3	Common +ve with 3 -ve supplies	3 x DIP switches
	Alternative tone activation (remote) (Option R)	1-5	Volt free activation (remote switching)	1 x DIP switch for stage 1. Tone pre-selected for subsequent stages
AC	Standard	1	Apply power	1 x DIP switch
	Alternative tone activation (remote) (Option R)	1-2	Volt free activation (remote switching)	1 x DIP switch for stage 1. Tone preselected for the 2nd stage

*Reverse polarity line monitoring can be used with common positive or negative switching to give up to 2 operational stages and a 3rd monitoring connection. An EOL resistor can be fitted as shown in the technical manual. All connection details are shown in the technical manual.

Current consumption: Based on a continuous 970Hz tone

Voltage	Current for IIC unit	Current for IIIC unit
12 Vdc	700 mA	716 mA
24 Vdc	329 mA	339 mA
48 Vdc	171 mA	173 mA
110 Vac	115 mA	122 mA
120 Vac	106 mA	113 mA
220 Vac	59 mA	63 mA
230 Vac	52 mA	55 mA
240 Vac	55 mA	58 mA
254 Vac	59 mA	63 mA


	Ex d/UL min	Max
Certified temperature	-60°C	+85°C


Operating temperature at launch (DC Only): -40 °C min +85 °C max
-55 °C as standard to follow. Please contact MEDC for low temperature options

	Short Flare	Long Flare
Max output (dB) 1400Hz @ 1m	113 dB	116 dB

For Labels and Entries select any option as required. For Options select either (N) None or (E) EOL as required
Tolerance +/-3dB. Please see the technical manual for tone specific SPL values

General arrangement drawing (all dimensions in mm)

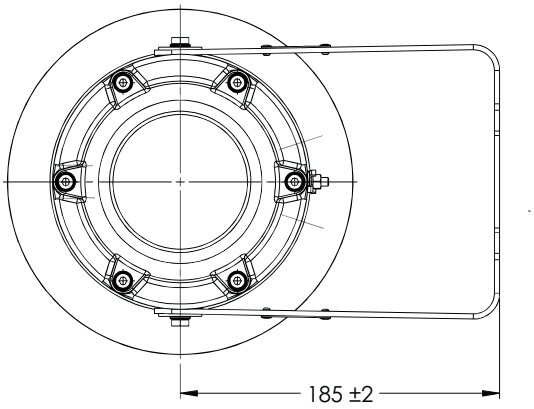

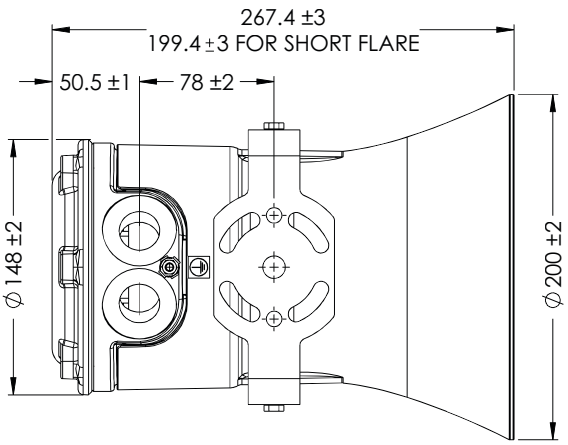

Ordering requirements

The following code is designed to help in selection of the correct unit. Build up the reference number by inserting the code for each component into the appropriate box

Model: DB3BM

Material: S

Finish	Code
Alloy	A
Stainless Steel	S

Ex Certification: D

Ex Certification	Code
UKEX/ATEX Ex d	D
IECEx Ex d	J
Weatherproof	W

Voltage: 048

Voltage	Code
12-48 Vdc	048‡
110 Vac	110
120 Vac	120*
220 Vac	220
230 Vac	230
240 Vac	240*
254 Vac	254

*Complies with UL regulated power supply requirements

Labels: DT

Labels	Code
None	N
Duty	D*
Tag	T*

*Please specify

Entries: 1B

Entries	Code
1 x M20	1B
2 x M20	2B
2 x M20 inc 1 x plug	2BP
1 x ½" NPT	1C
2 x ½" NPT	2C
2 x ½" NPT inc 1 x plug	2CP
1 x M25	1D
2 x M25	2D
2 x M25 inc 1x plug	2DP
1 x ¾" NPT	1E
2 x ¾" NPT	2E
2 x ¾" NPT inc 1x plug	2EP

Options: N

Options	Code
None	N
Swivel bracket	B‡
EOL	E*
Alternative tone activation	M**
Volt free activation (remote)	R**
Short flare	S
Custom tones (not std 27)	TΔ

‡ Alloy only - stainless steel has swivel as standard
*Specify value max power dissipation is 3W
**These options cannot be selected together
ΔSpecify details

Finish: R (RAL 3020)

Finish	Code
Natural black	N
Natural red	R
Yellow	Y
Grey	G
Blue	B
Special	S*

*Please specify

PUSH BUTTON DPDT CONTACT

POS.	TAG NUMBER	SERVICE
1	77-HS-001A	B-100 Fire Damper AHU1 Inlet Air
2	77-HS-001B	B-100 Fire Damper AHU1 Inlet Air
3	77-HS-002A	B-100 Fire Damper AHU2 Inlet Air
4	77-HS-002B	B-100 Fire Damper AHU2 Inlet Air
5	77-HS-003A	B-100 Fire Damper Exhaust Air
6	77-HS-003B	B-100 Fire Damper Exhaust Air
7	77-HS-004A	B-200 Fire Damper AHU3 Inlet Air
8	77-HS-004B	B-200 Fire Damper AHU3 Inlet Air
9	77-HS-005A	B-200 Fire Damper AHU4 Inlet Air
10	77-HS-005B	B-200 Fire Damper AHU4 Inlet Air
11	77-HS-006A	B-200 Fire Damper Exhaust Air
12	77-HS-006B	B-200 Fire Damper Exhaust Air
13	77-HS-007A	B-300 Fire Damper AHU5 Inlet Air
14	77-HS-007B	B-300 Fire Damper AHU5 Inlet Air
15	77-HS-008A	B-300 Fire Damper AHU5 Return Air
16	77-HS-008B	B-300 Fire Damper AHU5 Return Air
17	77-HS-009A	B-300 Fire Damper AHU6 Inlet Air
18	77-HS-009B	B-300 Fire Damper AHU6 Inlet Air
19	77-HS-010A	B-300 Fire Damper AHU6 Return Air
20	77-HS-010B	B-300 Fire Damper AHU6 Return Air
21	77-HS-011A	B-300 Fire Damper Exhaust Air
22	77-HS-011B	B-300 Fire Damper Exhaust Air
23	77-HS-012A	B-400 Fire Damper AHU7 Inlet Air
24	77-HS-012B	B-400 Fire Damper AHU7 Inlet Air
25	77-HS-013A	B-400 Fire Damper AHU7 Return Air
26	77-HS-013B	B-400 Fire Damper AHU7 Return Air
27	77-HS-014A	B-400 Fire Damper AHU8 Inlet Air
28	77-HS-014B	B-400 Fire Damper AHU8 Inlet Air
29	77-HS-015A	B-400 Fire Damper AHU8 Return Air
30	77-HS-015B	B-400 Fire Damper AHU8 Return Air
31	77-HS-016A	B-400 Fire Damper Exhaust Air
32	77-HS-016B	B-400 Fire Damper Exhaust Air

File: 1724000821-IN-DS-00004-02.xlsx
This document undergoes an issuance cycle within EDMS "Fusionlive".
Its distribution is electronically controlled. Once printed shall be considered as "NOT CONTROLLED" copy



Type 434...




Type 432...


Technical data


	Ex-control stations Type 432 I Type 434	
Marking accd. to 2014/34/EU	Ⓔx II 2 G Ex ed ib m IIC T6 Ⓔx II 2 D Ex tD A21 IP66 T80 °C	
EC-Type Examination Certificate	PTB 00 ATEX 3117	
IECEx Certificate of Conformity	IECEx BKI 04.0003	
Marking accd. to IECEx	Ex e II T6, Ex e ib IIC T6, Ex ed IIC T6 or Ex ed ib IIC T6	
Permissible ambient temperature	–20 °C up to +40 °C –55 °C up to +55 °C (option)	
Rated voltage	690 V AC (with control switch GHG 23 up to 500 V)	
Rated current	16 A (with control switch GHG 23 max. 10 A)	
Rated making-/rated breaking capacity accd. EN 60947-5-1	Ex41 AC-15: U_e 250 V / I_e 6 A U_e 500 V / I_e 4 A DC-13: U_e 24 V / I_e 6 A U_e 110 V / I_e 0.5 A	Ex23 AC-15: U_e 230 V / I_e 6 A U_e 500 V / I_e 4 A DC-13: U_e 24 V / I_e 2 A U_e 230 V / I_e 0.5 A
Connecting terminals	2 x 4 mm²	
Protection class	I	
Degree of protection accd. to EN 60529	IP66	
Cable glands/Gland plates/Enclosure drilling	2 x M25 cable gland incl. 1 blanking plug or optional 2 x M20 thread	
Enclosure material	Polyamide	
Enclosure colour	black	


	Type 432
Dimensions (L x W x H)	156 x 100 x 90 mm
Weight (empty)	0.47 kg





Traffolyte label red background - white letters (ARIAL font)
fixed by SS screws and insulated on the rear by PU resin




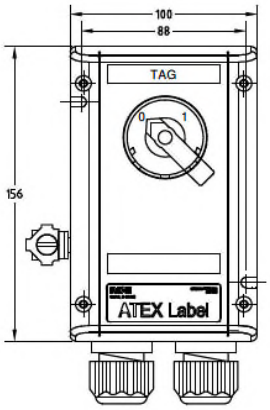

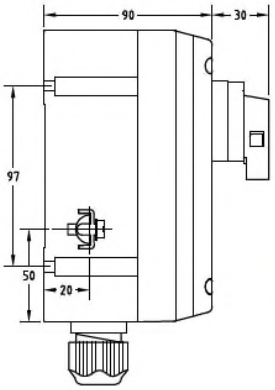





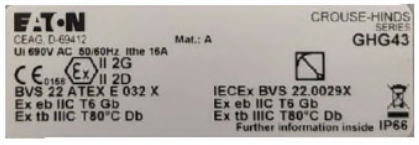

Technical data:
Manufactured by Eaton Crouse-Hinds Division
Model: GHG 432
Certificate No.
PTB 00 ATEX 3117
IECEx BKI 04.0003
Marking: ATEX and IECEx
II 2G Ex de IIC T6 Gb
II 2D Ex tb IIIC T80°C Db
-20°C ≤ tamb ≤ +55°C
Ui 690V
IP65

Specific characteristics:
- Polyamide (PA), black
- Closed with stainless steel screw
- M6 internal/external stainless steel earth stud

Components:
- No. 1 black selector switch with 2 position 2NC

Entries bottom side B:
- No. 2 M20 threaded holes

No. 1 1,6x60x10 mm white text on red background traffolyte tag fixed with stainless steel screws on the cover, sealed on the back with PU adhesive and engraved

Also a certification label fixed with back self adhesive on the cover