Base Load Power Hub (BLPH)

RESTRICTION ORIFICE

PACKING, HANDLING, SHIPPING, PRESERVATION AND STORAGE PROCEDURES

Document Number: 1724001690-QC-PRO-000011

ROSETTI MARINO

1	NO COMMENTS - APPROVED - WORK MAY PROCEED
2	MINOR COMMENTS - REVISE AND RESUBMIT - WORK MAY PROCEED
3	MAJOR COMMENTS – REJECTED – DO NOT PROCEED
	APPROVAL NOT REQUIRED

NOTE: Approval doesn't relieve the supplier from mandatory compliance with contractual documents and specifications. Comments made do not imply acceptance of any cost or delivery impact.

Sign	Date
PASQUALI Leonardo	07/10/2024

Document Class: 3

00	04/10/2024	Issue for Information (IFI)	MZ	GA	GO
Rev.	Date	Description	Prepared	Reviewed	Approved

TERRANOVA
WE DO PROCESS INSTRUMENTATION PRECISELY
SPRIANO Yukon MEC-RELA

This document undergoes an issuance cycle within EDMS Fusionlive". Its distribution is electronically controlled. Once printed shall be considered as "NOT CONTROLLED" copy

Revision / Change Log

Rev.	Description
00	Issue for Information (IFI)

HOLDS LIST

No.	Description
1	
2	
3	
4	

This document undergoes an issuance cycle within EDMS Fusionlive". Its distribution is electronically controlled. Once printed shall be considered as "NOT CONTROLLED" copy

1. CONSTRUCTION

Lumber must be new, sound and well-seasoned with a moisture content between 12 and 20%. Knots must be sound and not in excess of 1/3 of the width of the board and must not cause any nailing interference. Where possible, nails should be driven into side grain of lumber. Exterior grade plywood of equivalent strength, minimum 12 mm thickness, may also be used as sheathing.

- Lumber sizes indicated are nominal and must be considered as a minimum.
- Where a range is indicated, the lumber dimensions will depend on the weight and type of materials to be packed. Vendor is to ensure that the lumber dimensions selected are adequate for the weight and type of materials.
- Fasteners must be of adequate length and quantity and must be of the coated type; e.g., cement, resin, galvanized, or chemically etched. Staples are not permitted, except in the securing of plywood sheathing.
- Metal strapping must be unannealed steel applied with a stretching tool and secured with joints as strong as the strapping. No sharp edges are to be left exposed.
- The top of the sides of lumber boxes must be lined with waterproof paper or plastic film.

2. LAYOUT


- Articles must be nested or packed firmly in minimal space. Unnecessary free space within the box must be avoided to reduce shipping costs.
- Fragile articles must be wrapped in cushioning material to provide protection and prevent movement.
- Heavy items must be secured to the base of the box and any movement prevented by means of adequate bracing, with cushioning used as needed.

This document undergoes an issuance cycle within EDMS Fusionlive". Its distribution is electronically controlled. Once printed shall be considered as "NOT CONTROLLED" copy

3. SAMPLE DRAWINGS


BOX TYPE 1

For net weights up to 1,000 kg (2,200 lb)

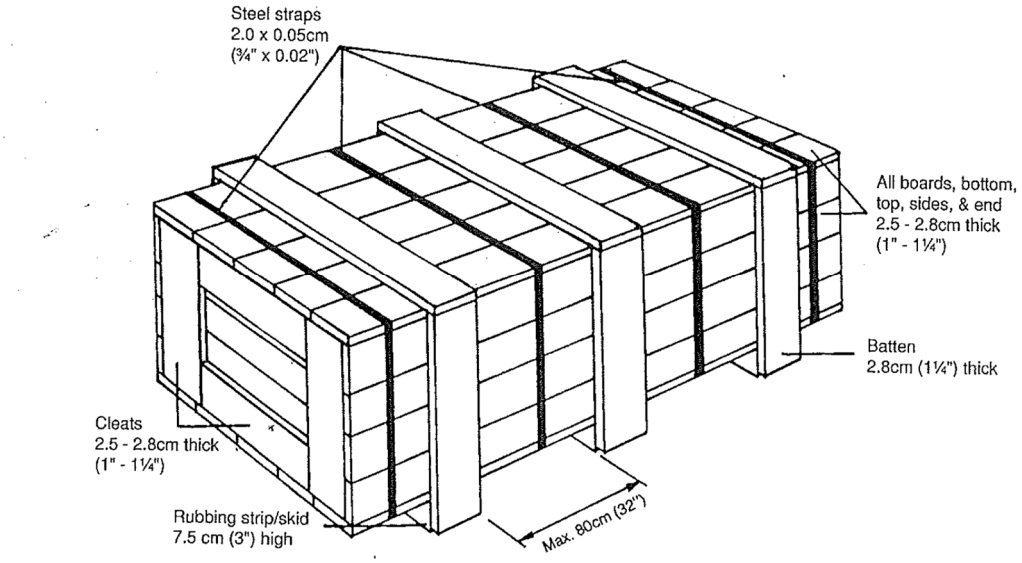

BOX TYPE 2

For net weights 1,000-5,000 kg (2,200-11,000 lb)

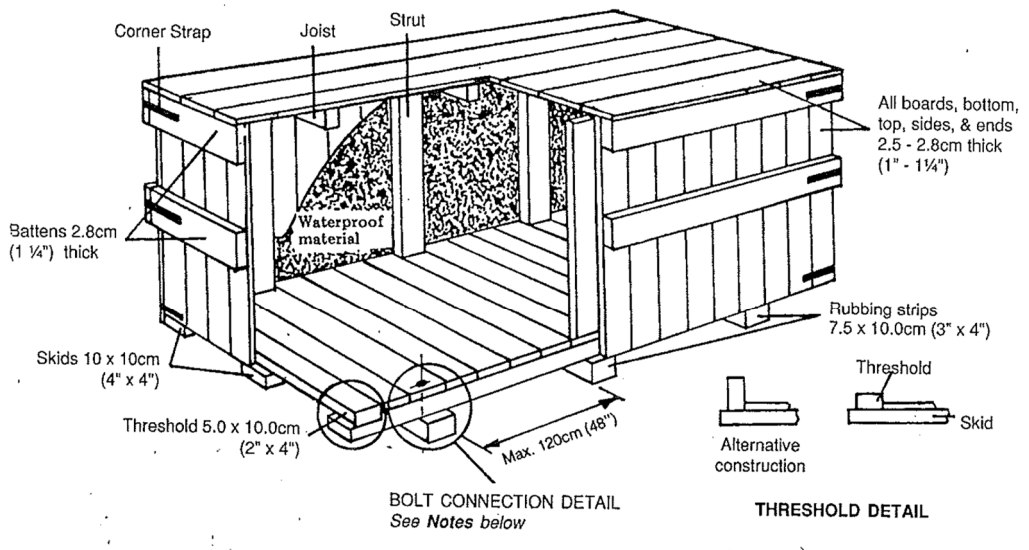


Notes: 1. Bolt connections are required when point loads will result in distortion of the base during lifting by slings. If required, adopt BOLT CONNECTION DETAIL shown in BOX TYPE 3.

2. Joists and struts may be required to provide top load support and to prevent compression by slings.

This document undergoes an issuance cycle within EDMS Fusionlive". Its distribution is electronically controlled. Once printed shall be considered as "NOT CONTROLLED" copy

BOX TYPE 3

For net weights 5,000-15,000 kg (11,000-33,000 lb)

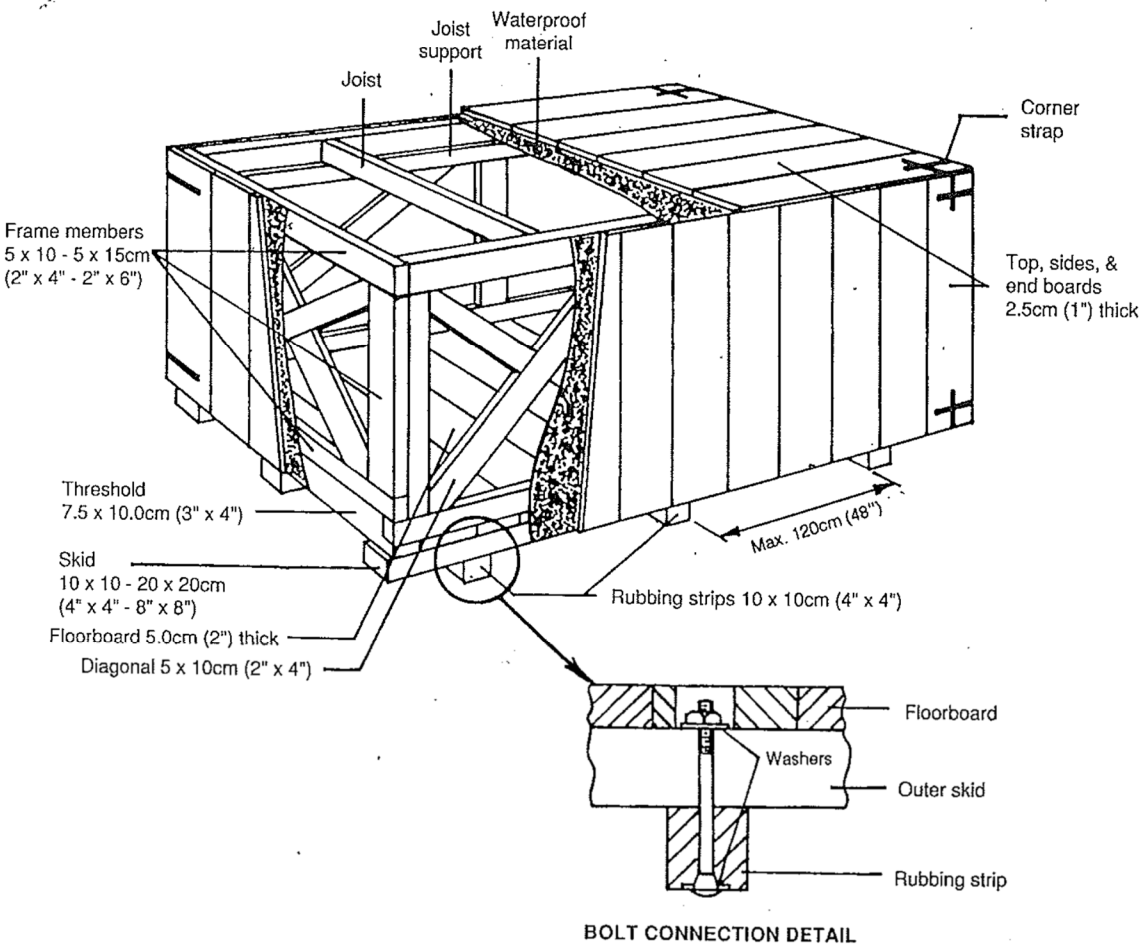

BOLT CONNECTION DETAIL

Notes: 1. For net weights over 15,000 kg (33,000 lb), box design is to be approved by the Buyer.

2. Joists and struts of adequate size and quantity must be applied to provide top load support and to prevent compression by slings.

This document undergoes an issuance cycle within EDMS Fusionlive". Its distribution is electronically controlled. Once printed shall be considered as "NOT CONTROLLED" copy

4. GENERAL NOTES

- The equipment is protected from damage due to handling and environmental elements during shipment.
- All opening, weld-end and threaded connections shall be especially protected from damage and shall be adequately prepared as to be free of corrosion and foreign matter.
- All loose parts shall be crated or boxed for shipment and appropriately identified.
- All equipment shall be suitable to the environmental conditions.
- All boxes must identify with capital characters of height suitable to the dimensions of the same box, brought with indelible ink or with varnishes covered of rubber lacquer after their application.
- Marking will come carried out on 3 sides (2 lateral ones and the cover of the case).
- Packing list will come applied to the case by means of envelope in aluminum.

5. PACKING NUMBER

The package number of each CARGO shall consist of consecutive number shown as below mentioned. Total number of packages shall be indicated in each package.

Example: Package No.001 (Serial Number of outer Box) of XXX (Total Number of packages)

6. PACKING STYLE

Unless being impossible, impractical or interfering prefabrication, the package shall not exceed the following dimension and weight:

- Gross Weight: 24.0 Tons
- Length: 12.0 Meters
- Width: 2.5 Meters
- Height: 2.5 Meters

This document undergoes an issuance cycle within EDMS Fusionlive". Its distribution is electronically controlled. Once printed shall be considered as "NOT CONTROLLED" copy

7. PACKING LIST FORMAT

A separate packing list will be issued for each package. For packing list format, see example below:

ROSETTI MARINO SPA CLIENT: CROSSWIND

PACKING-LIST REF: PO NUMBER - VENDOR NAME -122A10 JOB No.: 123A90 CROSSWIND BLPH
DATE: XX/XX/2023

DATE OF TRANSPORT:	NA	CONTAINER TARE	NA	KG
KIND OF TRANSPORT:	NA	CONTAINER TYPE/NUMBER/SEAL N.	NA	
TRUCK PLATE NUMER:	NA	TOTAL NET WEIGHT	0,00	KG
TERMS OF DELIVERY:		TOTAL GROSS WEIGHT	0,00	KG
		TOTAL PACKAGES	0,00	PC
		TOTAL VALUE	0,00	EUR

SHIPPER: VENDOR BUSINESS ADDRESS

CONSIGNEE: ROSETTI MARINO SPA
VIA TRIESTE 230
48122 RAVENNA
ITALY

NOTIFY: ROSETTI MARINO SPA
VIA TRIESTE 230
48122 RAVENNA
ITALY
KAO SONIA PAZZI/AURELIO PENSERINO
MAIL: LOGISTIC@ROSETTI.IT
PHONE: +39 0544878075

DELIVERY ADDRESS: ROSETTI MARINO SPA
VIA DEL MARCHESATO 37
48023 MARINA DI RAVENNA
ITALY

ITEM	KIND AND NUMBER OF PACKAGE	PACKAGE DIMENSION [MM]			PO REF.	PO ITEM	MATERIAL DESCRIPTION	Q.TY [PC]	METER	TAG No.	CODE NUMBER	HEAT	UNIT WEIGHT [KG/PZ]	TOTAL NET WEIGHT [KG]	TOTAL GROSS WEIGHT [KG]	UNIT PRICE EURO	TOTAL PRICE EURO	COUNTRY OF ORIGIN	HS CODE
		LENGTH	WIDTH	HEIGHT															
1														0,00		0,00	0,00		
2														0,00		0,00	0,00		
3														0,00		0,00	0,00		
4														0,00		0,00	0,00		
5														0,00		0,00	0,00		
6														0,00		0,00	0,00		
7														0,00		0,00	0,00		
8														0,00		0,00	0,00		
9														0,00		0,00	0,00		
10														0,00		0,00	0,00		
11														0,00		0,00	0,00		
12														0,00		0,00	0,00		
13														0,00		0,00	0,00		
14														0,00		0,00	0,00		
15														0,00		0,00	0,00		
16														0,00		0,00	0,00		
17														0,00		0,00	0,00		
18														0,00		0,00	0,00		
19														0,00		0,00	0,00		
20														0,00		0,00	0,00		
TOTAL PACKAGES				0				0	0,00				TOTAL WEIGHT KG:	0,00	0,00	EUR	0,00		
COST OF TRANSPORT																EUR			
TOTAL VALUE																EUR	0,00		